



AFP2PDF Plus Transform User's Guide

Version 1.4.1

Overview

1

Installing AFP2PDF Plus Transform

2

Architecture and Configuration

3

Using the AFP2PDF Plus Transform

4

Using the AFP2PDF Plus Utility Programs

5

Working with AFP Resources

6

Working with AFP Images

7

JAVA Application Programming Interfaces

8

Comparison with AFP2PDF Transform

9

For information not in this
manual, refer to the Help
System in your product.

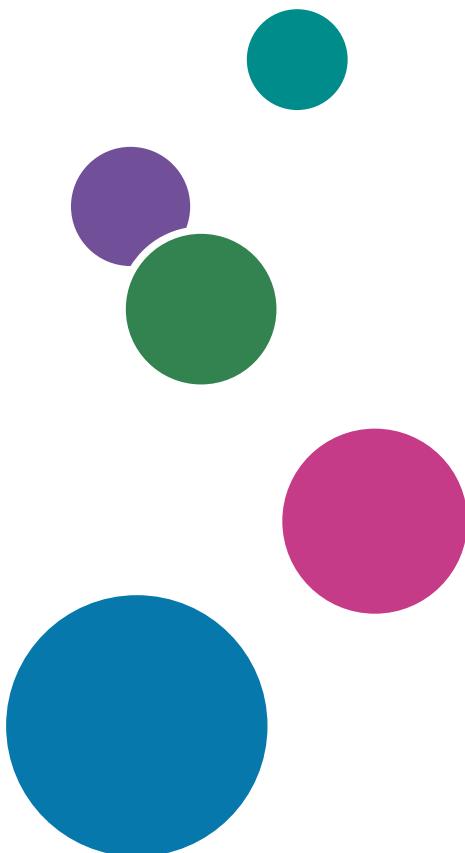


TABLE OF CONTENTS

Introduction

Important.....	4
Cautions regarding this guide.....	4
Publications for the RICOH Transforms Suite.....	4
Symbols.....	5
Abbreviations	6
Trademarks.....	8

1 Overview

Benefits	9
Limitations	9

2 Installing AFP2PDF Plus Transform

Installing AFP2PDF Plus Transform using the installer	12
Installing a Permanent License.....	14
Revoking the License Key	18
Configuring CMOD to work with AFP2PDF Plus Transform	19
Configuring IBM Content Navigator to work with AFP2PDF Plus Transform	19

3 Architecture and Configuration

Architecture.....	21
Configuration.....	22
Configuring the Server.cfg File	22
Configuring the Logging.properties File	23
Configuring the a2pcclient.cfg File	24
AFP2PDF Plus Transform Security	25
Encryption	25
Certificate Signatures.....	26

4 Using the AFP2PDF Plus Transform

Starting and Stopping the AFP2PDF Plus Server on a Windows Server	27
Starting and Stopping the AFP2PDF Plus Server on a UNIX Server	27
AFP2PDF Plus Transform Command	27
Syntax	27
Parameters	28
Return Codes.....	31
AFP2PDF Plus Transform Options File.....	31
Working with AFP Visual Environment Control Files.....	48

Running AFP2PDF Plus in a private Azure Cloud	48
---	----

5 Using the AFP2PDF Plus Utility Programs

split_ftp2pdf Command	51
Syntax	51
Parameters	51
The XML Format of Output TLE Information when -tle is Specified	54
Return Codes	54
ArchiveLoad_ftp2pdf Command	55
Syntax	55
Parameters	55

6 Working with AFP Resources

Files Supplied for Mapping Fonts	60
Using the country.cfg configuration file	61
Coded Font Files	61
Character Set Definition File	62
Code Page Definition File	65
Code Page File Map	66
Alias File	67
Font Mapping File	68
Process for Mapping Fonts	69
Using Custom AFP Raster Font Files	69
Using Custom Font Metric Files	70
Mapping AFP Fonts to Type 1 Fonts	72
Using AFP metrics in mapped font	72
Mapping AFP Fonts to TrueType Fonts, OpenType Fonts, or TrueType Collection Fonts	72
Using AFP TrueType Fonts	73
Using User Defined Characters within a DBCS Font	73
Character encoding	74

7 Working with AFP Images

Adding background image from a PDF file	75
Mapping AFP images	75
Creating the image map configuration file	76
Identifying AFP images in the image map configuration file	77
Removing images using the image map configuration file	77
Substituting existing images with AFP2PDF Transform	78

Substituting AFP shaded images with colored areas	79
Adding an image to the transform output.....	81
Adding a shaded area to the transform output	84
Adding an image or shaded area to the transform output based on a TLE key-value pair.....	84

[8 JAVA Application Programming Interfaces](#)

[9 Comparison with AFP2PDF Transform](#)

[INDEX](#)

Introduction

Important

To the maximum extent permitted by applicable laws, in no event will the manufacturer be liable for any damages whatsoever arising out of failures of this product, losses of documents or data, or the use or non-use of this product and operation manuals provided with it.

Make sure that you always copy or have backups of important documents or data. Documents or data might be erased due to your operational errors or malfunctions of the software. Also, you are responsible for taking protective measures against computer viruses, worms, and other harmful software.

In no event will the manufacturer be responsible for any documents created by you using this product or any results from the data executed by you.

Cautions regarding this guide

- Some illustrations or explanations in this guide could differ from your product due to improvement or change in the product.
- The contents of this document are subject to change without notice.
- No part of this document may be duplicated, replicated, reproduced in any form, modified, or quoted without prior consent of the supplier.

Publications for the RICOH Transforms Suite

This section provides a list of all the publications for the RICOH Transforms Suite.

Instruction manuals

- **AFP2PDF PLUS**

For information about AFP2PDF PLUS, see these documents:

- *AFP2PDF Plus User Guide - 1.4.1*
- *AFP2PDF Plus Quick Start Guide*
- *AFP2PDF Plus Setup Guide 1.4.1*
- *AFP2PDF Plus Release Notes 1.4.1*
- *AFP2PDF Plus - Summary of Updates*

- **AFP Visual Environment**

For information about AFP Visual Environment, see these documents:

- *AFP Visual Environment User Guide 1.4.1*
- *AFP Visual Environment Release Notes 1.4.1*

- **AFPMerge**

For information about **AFPMerge**, see these documents:

- *AFPMerge User Guide 1.4.1*
- *AFPMerge Release Notes 1.4.1*

- **Line2PDF Plus**

For information about **Line2PDF Plus**, see these documents:

- *Line2PDF Plus User's Guide 1.4.1*
- *Line2PDF Release Notes 1.4.1*

- **PCL2PDF**

For information about **PCL2PDF**, see these documents:

- *PCL2PDF User's Guide 1.4.1*
- *PCL2PDF Release Notes 1.4.1*

- **PS2PDF**

For information about **PS2PDF**, see these documents:

- *PS2PDF User's Guide 1.4.1*
- *PS2PDF Release Notes 1.4.1*

- **Tiff2PDF**

For information about **Tiff2PDF**, see these documents:

- *Tiff2PDF Plus User Guide 1.4.1*
- *Tiff2PDF Plus Release Notes 1.4.1*

Symbols

The following symbols are used in this manual to help you to identify content quickly.

 **Important**

- This symbol indicates points to pay attention to when using the product. Be sure to read these explanations.

 **Note**

- This symbol indicates helpful supplementary information that is not essential to completing a task.

Bold

Bold type indicates the names of commands and parameters.

Bold underline

Underlined bold type indicates the default value.

Italic

Italic type indicates variables that you must replace with your own information.

Monospace

Monospace type indicates computer input and output and file names.

[]

Square brackets indicate that a value is optional.

|

A vertical bar indicates a choice between values.

...

An ellipsis indicates that a series can continue.

Abbreviations

ACIF

AFP Conversion and Indexing Facility

AES

Advanced Encryption Standard

AFM

Adobe Font Metric

AFP

Advanced Function Presentation

API

Application programming interface

AVE

AFP Visual Environment

BCOCA

Bar Code Object Content Architecture

CMOD

Content Manager OnDemand

CMR

Color management resource

CPGID

Code Page Global Identifier

DBCS

Double-Byte Character Set

ECM

Enterprise Content Management

FIFO

First In First Out

GIF

Graphical Interchange Format

IANA

Internet Assigned Numbers Authority

ICN

IBM Content Navigator

ICU

International Components for Unicode

IP

Internet Protocol

JFIF

JPEG File Interchange Format

JPEG

Joint Photographic Experts Group

JVM

JAVA Virtual Machine

NIST

National Institute of Standards and Technology

PCL

Printer Command Language

PDF

Portable Document Format

PTOCA

Presentation Text Object Content Architecture

RAT

Resource Access Table

STC

Set Text Color

TCP/IP

Transmission Control Protocol/Internet Protocol

TIFF

Tagged Image File Format

TLE

Tag Logical Element

UT

Universal Time

Trademarks

These terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

- AIX
- IBM
- z/OS

Adobe and PostScript are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft and Windows are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Java is a registered trademark of Oracle and/or its affiliates.

Sentinel® is a registered trademark of Thales DIS CPL USA, Inc.

The proper names of the Windows operating systems are as follows:

- Windows 10:
 - Microsoft Windows 10 Pro
 - Microsoft Windows 10 Enterprise
- Windows 11:
 - Microsoft Windows 11 Pro
 - Microsoft Windows 11 Enterprise
- Windows Server 2016:
 - Microsoft Windows Server 2016 Standard
- Windows Server 2019:
 - Microsoft Windows Server 2019 Standard
- Windows Server 2022:
 - Microsoft Windows Server 2022 Standard

1. Overview

- **Benefits**
- **Limitations**

The AFP2PDF Plus Transform converts AFP documents into Adobe Acrobat PDF files by exactly mapping AFP format to PDF format.

The AFP2PDF Plus Transform lets you:

- View documents with the same fidelity as if they were printed. If the Adobe Acrobat plug-in is installed with a web browser, you can view and print these documents within the browser application.
- Use configuration files to customize how AFP documents are transformed.
- Fully integrate with the IBM Content Manager OnDemand Web Enablement Kit and the IBM Content Navigator.

Benefits

The AFP2PDF Plus Transform gives you these added benefits:

- Support for all types of bar code objects from the Bar Code Object Content Architecture (BCOCA).
- Client/Server implementation.
- Greatly improved transformation speed over AFP2PDF (5876-W01).
- Larger than 2-GB input and output file support.
- Reduce costs associated with printing and mailing by delivering documents electronically.
- Quickly retrieve your information within multi-page documents using Adobe Acrobat search and navigation features.
- Print AFP2PDF Plus Transform documents on any local printer using the print function in Adobe Acrobat.
- Increase control over your information with an added layer of security and encryption. To control modification, copying, and printing, define an owner password; define an end-user password to control document access; and add a digital signature to provide more security.

Limitations

The current limitations of the AFP2PDF Plus Transform include:


- When AFP data formatted for N-up portioning is encountered, the multiple partitions that make up the physical AFP page are converted to separate pages in the PDF file.
- Only limited support is available for object containers with TIFF and JFIF image formats.
- Color management resource (CMR) information contained in AFP resources is ignored.
- Unicode Complex Text, such as bidirectional layout processing and glyph processing, is not supported.
- Linked TrueType fonts and the use of a Resource Access Table (RAT) are not supported.
- Running AFP2PDF Plus using IBM Semeru Java on Windows and Linux is not supported.

2. Installing AFP2PDF Plus Transform

- Installing AFP2PDF Plus Transform using the installer
- Installing a Permanent License
- Revoking the License Key
- Configuring CMOD to work with AFP2PDF Plus Transform
- Configuring IBM Content Navigator to work with AFP2PDF Plus Transform

AFP2PDF Plus Transform has a different architecture from the AFP2PDF Transform.

AFP2PDF Plus Transform Architecture

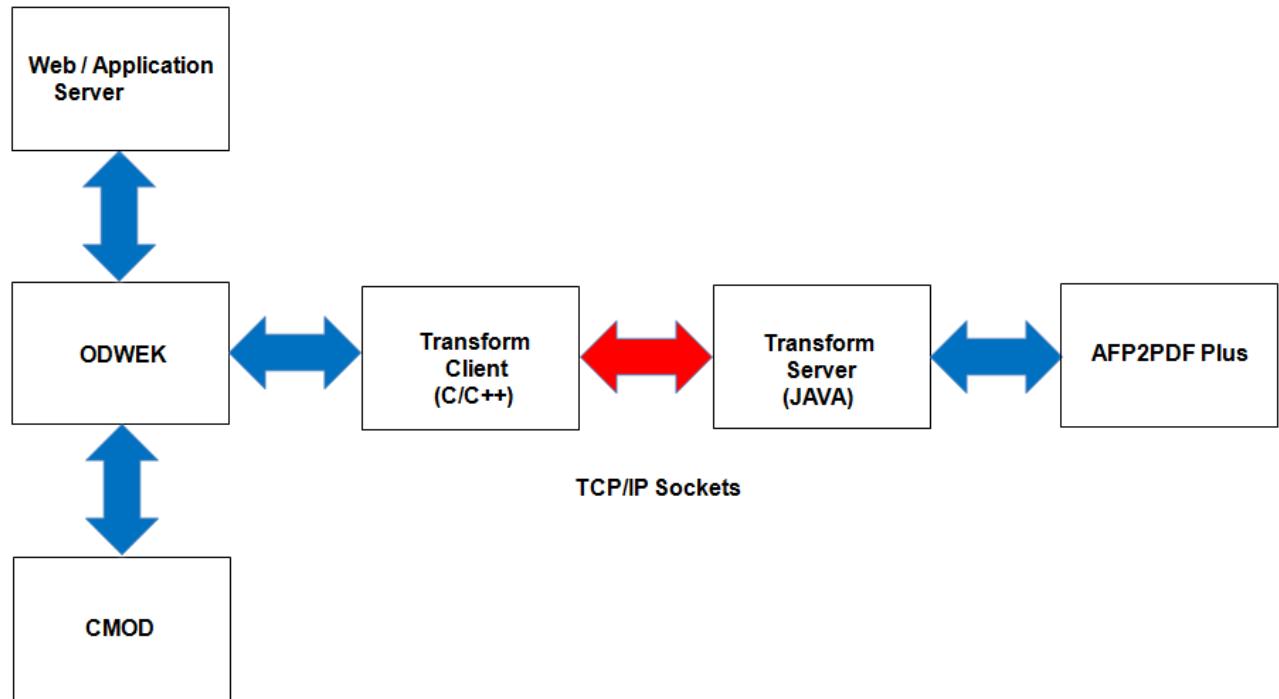

Since the new AFP2PDF Plus for JAVA Transform is designed to integrate with existing AFP2PDF installations, it has both client and server functions.

The transform client is a C/C++ command-line program that has parameters identical to the current AFP2PDF Transform.

The transform server is JAVA-based and performs various functions:

- Accepts requests from the transform client for document conversion
- Keeps the JAVA Virtual Machine (JVM) active without starting and stopping after each conversion
- Spawns a thread for each document to be converted, taking advantage of multi-core processors

Software requirements for the AFP2PDF Plus Transform:

- Transform requirements:
 - IBM AIX 7.1 or later
 - IBM z/OS UNIX System Services V1.13 or later
 - Microsoft Windows 10 Pro, Enterprise
 - Microsoft Windows 11 Pro
 - Microsoft Windows Server 2016 Standard

- Microsoft Windows Server 2019 Standard
- Microsoft Windows Server 2022 Standard
- Linux Kernel 2.6.18 or later (x86) with fontconfig package installed.
- Linux Kernel 2.6.09 or later (IBM Z system) with fontconfig package installed.
- Transform server requirements: 64bit version of JAVA v1.8 or later.
- End-user client requirements: Adobe Acrobat, Acrobat Reader, or Acrobat Plug-In 9.0 or later.
- To run the installer, you need to have at least 350 MB of free space in the operating system temporary directory.

2

Hardware requirements for the AFP2PDF Plus Transform:

- AFP2PDF Plus does not have any additional CPU requirements in addition to what is already required to run a supported operating system.
For optimal performance, the number of CPU threads should at least match the number of jobs expected to run simultaneously. Each job is run in a single threaded fashion. Thus, having a higher thread count CPU does not help if running one job at a time, but it helps when running multiple jobs at the same time.
- Minimum of 2 GB available RAM is required.
Depending on the workload, the performance can be improved by using more memory. The maximum amount of memory used by AFP2PDF Plus is configurable through the Java parameter `-Xmx` in the **afp2pdf.bat** and **StartAFP2PDFServer.bat** files on Windows and **afp2pdf.sh** and **StartAFP2PDFServer.sh** on AIX and Linux. For optimal performance, we recommend setting the maximum memory to at least twice the size of the combined inputs of jobs expected to run at any given time, including external resources. So for example, if in the server mode, the maximum load is 10 jobs running concomitantly with an average size of 200 MB of inputs per job, the recommended value is 4 GB.
- Minimum 450 MB available space for installation:
 - 100 MB available hard disk space.
 - 350 MB available for the operating system temporary file.

The data consisted of resources, inputs, and outputs used by AFP2PDF Plus takes more hard disk space than the AFP2PDF Plus application itself.

The AFP2PDF Plus transform works with computers configured with any network configuration (IPv4 or IPv6).

Installing AFP2PDF Plus Transform using the installer

The AFP2PDF Plus Transform can now be installed using an executable jar file, `setupafp2pdfPlus`, from the ISO file or downloaded from <https://dl.ricohsoftware.com>.

To run the installer, perform these steps:

1. Use the following command: `java -jar setupafp2pdfPlus_1.xxx.xx.jar`, where `xxx.xx` is the transform version; for example, `java -jar setupafp2pdfPlus_1.400.00.jar` for the 1400.00 AFP2PDF Plus version.

 **Note**


On some Java versions, due to a bug, the above java -jar command might not start the installer. Use this additional parameter: java -Djdk.util.zip.disableZip64ExtraFieldValidation=true -jar setupafp2pdfPlus_1.XXX.XX.jar

Depending on the capabilities of your operating system, the AFP2PDF Plus transform opens either using a graphical user interface or a command line.

 **Note**

- To install the transform, you need 64 bit Java 1.8 or later and administrative rights.

2. Follow the installation steps and select either a new install or an upgrade.

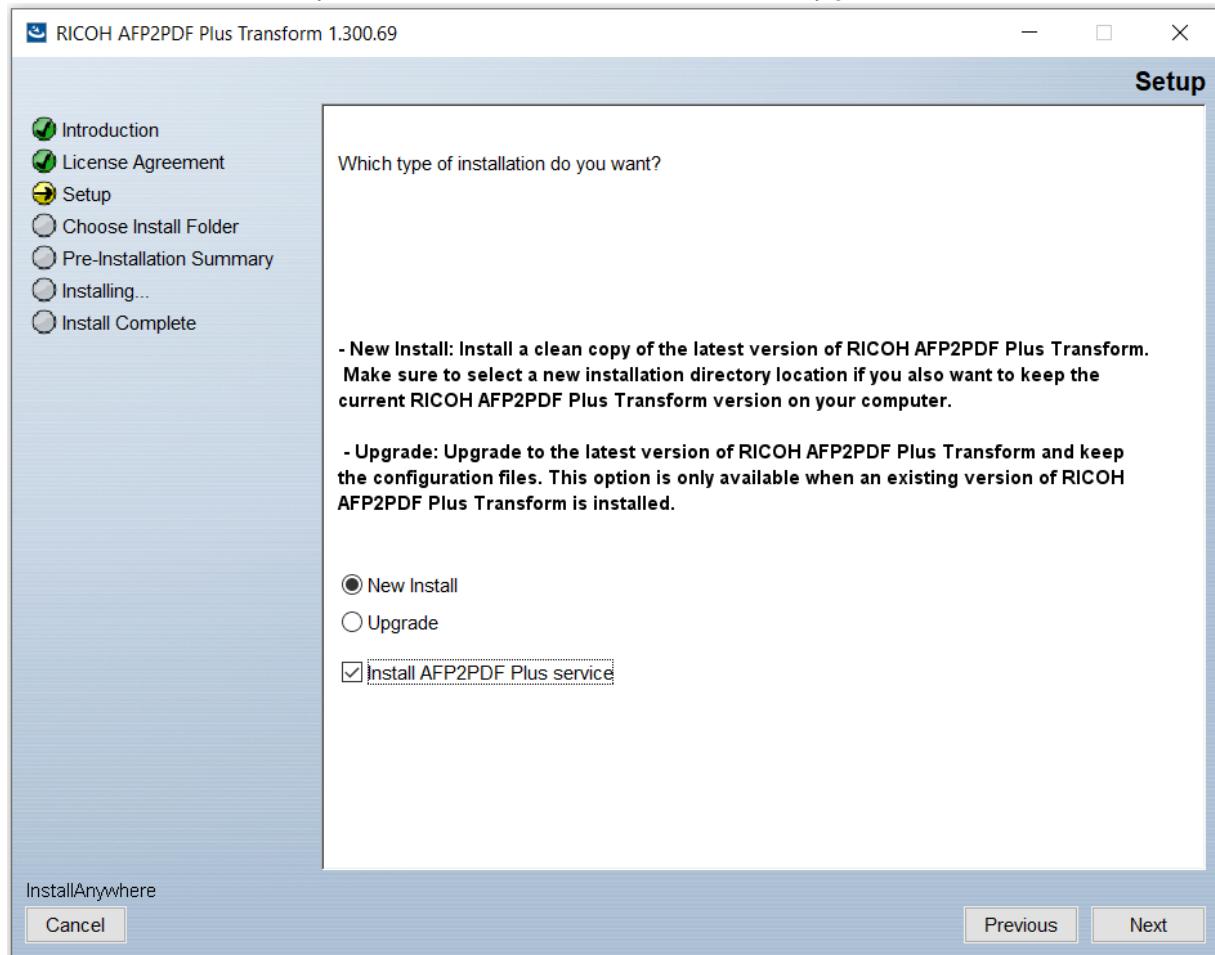

 **Note**

- If you select the **Upgrade** option, you install AFP2PDF Plus in a directory where a previous transform exists. During an upgrade, the configuration files are not modified, only the binaries are updated.
- You can install the AFP2PDF Plus service as an additional option. The AFP2PDF Plus service is supported on Windows, AIX, and Linux operating systems. When installed, this service starts the AFP2PDF server at boot time and can be managed with the standard service tools and commands specific to each operating system. To install the service, you must have root or administrator privileges.
 - On Windows, the AFP2PDF Plus installer looks for a Java installation based on the PATH environment variable and uses that installation as a startup point for the service. The service continues to work as long as the path for the Java installation does not change.
 - On Linux, the AFP2PDF Plus service requires the system service manager.
 - When the installer upgrades a previous installation of AFP2PDF Plus where the service option was enabled, the new installation overrides the service. The old service might still be active until a machine reboot or a restart of the service manager.
- When you perform a fresh installation of the AFP2PDF Plus transform you can specify the default font handling behavior. These are the two options:
 1. Fonts are mapped by default. This option ensures smaller output PDF files size. However, the AFP files that contain fonts that do not have a font mapping will not be displayed correctly.
 2. Fonts are processed and embedded in the resulting PDF files. By using this option, the output PDF files will look more like the input AFP files.
- On non-Windows operating environments the installer uses the /tmp directory to unpack files and run certain scripts. If there are limitations on the /tmp folder of the system, such as non-exec flag or limited space, a different temporary file directory can be specified using the -Dlax.n1.env.iatempdir= parameter. Example: java -Dlax.n1.env.iatempdir=/custom_temp_dir/ -jar setupafp2pdfPlus_1.400.00.jar.

The **split_afp2pdf** and **archiveload_afp2pdf** programs are delivered as a part of the AFP2PDF Plus Transform. The operating system prerequisites are the same as for the AFP2PDF Plus Transform.

Installing a Permanent License

To continue using AFP2PDF Plus after the trial license expires, you must install a permanent license on the computer where the product is installed. The permanent license is valid only on this computer.


To install a permanent license for AFP2PDF Plus on Windows, Linux, AIX:

1. Run the license management tool AFP2PDFLicenseManager.jar located in the `license_installer` folder where AFP2PDF Plus is installed, and follow the installation steps.
2. When prompted **You can either install a new license or revoke the currently installed one.**, select **Install License - Upload and apply a new license file**.
3. Make sure that you have the e-mail containing the entitlement ID (EID) that you received from Ricoh.
4. If the computer where AFP2PDF Plus is installed does not have Internet access:

1. Do not close the license application on the computer where AFP2PDF Plus is installed.
2. Log into a computer that has Internet access.
3. Use the Remote Desktop Connection to connect to the computer where AFP2PDF Plus is installed.
4. Log in with the same user name and password that you used when you started the license application.
5. On the computer that has Internet access, go to this Web site: <https://dl.ricohsoftware.com>.

2

What action would you like to take?

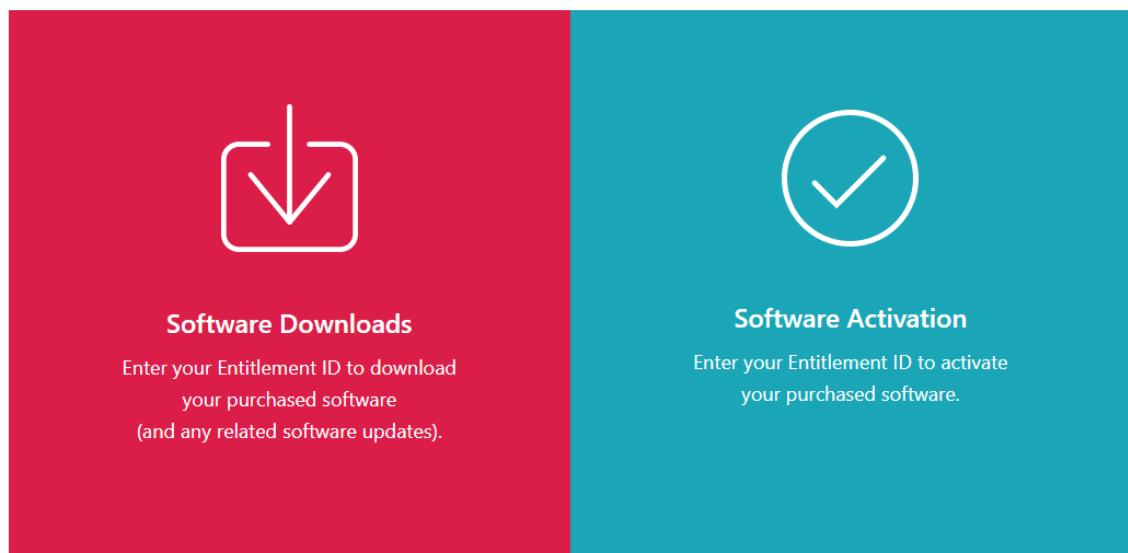

6. Click **Software Activation** on the right side of the screen.
7. In the **Software Activation** dialog, insert the EID and the system fingerprint.

2

Software Activation

Use the form below to activate your software. Enter your Entitlement ID and the System Fingerprint generated by the software.

Enter your EID:


Enter your System Fingerprint:

Confirm Content

1. Copy and paste the EID from the e-mail you received from Ricoh.
2. Return to the license management application on the computer where AFP2PDF Plus is installed. Copy your machine fingerprint. This action copies the 16-character system fingerprint that uniquely identifies the computer where AFP2PDF Plus is installed to the clipboard.
3. Return to the Software Activation webpage. Paste the system fingerprint in the **Enter your System Fingerprint** field.
4. Click **Confirm Content**.
8. In the **Activation Content Confirmation** dialog:
 1. Review the confirmation information.
 2. Click **Activate**.

You will receive a confirmation that your software has been activated. A license key is generated with an Activation ID for the client computer and is displayed on the screen.

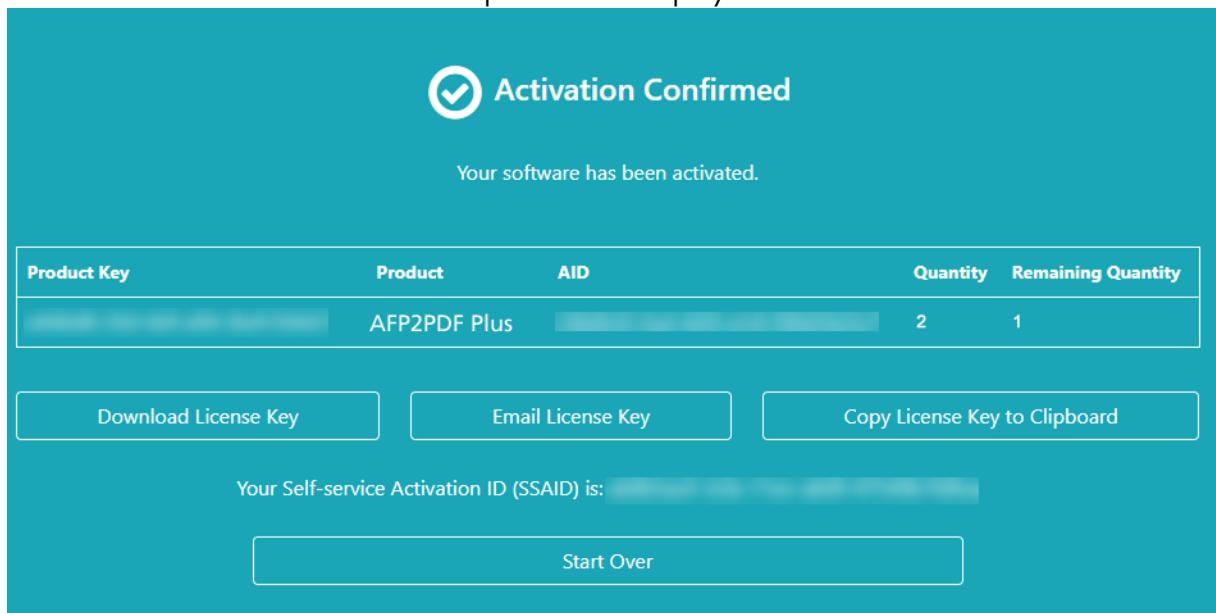

2

 **Note**

The number of activations of the license is displayed under **Quantity**. The remaining number of activations available for this license is displayed under **Remaining Quantity**.

9. To download the license key, click **Download License Key**. The saving procedure and file type are different for each browser. Record the folder where you saved the license key.
10. To e-mail the license key file to someone else, click **Email License Key**.

Enter Email Address



Please enter the email address you want the license key sent to.

Email

your_email@domain.com

Cancel

Send

1. Type the e-mail address.
2. Click **Send**.

11. If you are finished, close the browser tab. To restart the process, click **Start Over**.
12. If you accessed the Internet from a different computer than the one where AFP2PDF Plus is installed, copy the license file to the computer where AFP2PDF Plus is installed.

13. In the license management application on the system where AFP2PDF Plus is installed, enter the path where your license file is installed and click **Choose....**
14. Locate the license file and click **Select**.
15. Then, click **Next** and select **Install License - Upload and apply a new license file**. and follow the installation steps.
16. Review the installation summary and click **Install**.
You see a message that the license was installed successfully.
17. Click **Done**.
18. Restart AFP2PDF Plus if you are using it as a service.

Revoking the License Key

The Self-service License Key Revoke System (SSR) is designed to permit Ricoh customers a method to move license keys between systems and recover from system failures. If you must revoke more than 2 keys from the same EID, contact your local Ricoh Support team for assistance.

To revoke the license key:

1. Run the license management tool AFP2PDFLicenseManager.jar located in the `license_installer` folder where AFP2PDF Plus is installed, and follow the installation steps.
2. Select the path where your transform is installed.
3. Then, select **Revoke License - Remove the current license file from the system**. and click **Install**.
4. Select the location that you want to use for your current license, then click **Next**.
5. You are instructed to visit <https://dl.ricohsoftware.com/?revoke> to revoke your license.
6. Click the **Self-Service Revoke** button.
7. Select one of the 3 available revoke methods from the **Revoke By** list:

Entitlement ID (EID)

The EID that you must revoke for the software reporting a license violation condition.

Activation ID (AID)

The AID is necessary when you only must revoke a single set of keys for 1 EID. For example, if you accidentally activated using the wrong system fingerprint and have the AID string available.

License Key File Upload (license.key file)

Best general-purpose option for resetting all EIDs installed for a specific product on a given server. You can select a **license.key** file.

8. Depending on your selection from the **Revoke By** list, enter the EID, AID, or upload the key file in the **Enter your EID**, **Enter your AID**, or **Upload Your License File (Max file size, 150 KB)** fields.
9. Enter your company name in the **Company Name** field. Make sure to use the same the company name used in the original EID email.
10. To receive the revoke details, enter your valid business email address in the **Business Email Address** field.

11. Click **Submit**.

After 30 seconds, you receive a notification on the website. If your request could not be approved automatically and requires review, you receive an email from the reviewer within the next few business days.

 **Note**

- Depending on the network speed or processing time, it may last up to 90 seconds until you receive the notification.

12. Return to the license management application and click **Next**.

13. Review the summary and click **Install**.

You will see a message that the license was successfully revoked.

14. Click **Done**.

2

Configuring CMOD to work with AFP2PDF Plus Transform

Since the new AFP2PDF Plus Transform is designed to integrate seamlessly with existing Content Manager OnDemand Web Enablement Kit / AFP2PDF Transform installations, see the appropriate IBM documentation for more details about configuring the programs to operate together:

- *IBM Content Manager OnDemand for Multiplatforms, V8.5: Web Enablement Kit Implementation Guide*, SC19-2941
- *IBM Content Manager OnDemand for Multiplatforms & z/OS, V9.0 / V9.5: Web Enablement Kit Implementation Guide*, SC19-3353
- *IBM Content Manager OnDemand for z/OS, V8.5: Web Enablement Kit Implementation Guide*, SC19-1215

Specifically, you must modify the `arswww.ini` file to call the AFP2PDF Plus Transform when processing an AFP file. At a minimum, you must make these configuration changes:

- The `AFPVViewing` option must be `pdf` in the browser sections.
- The `InstallDir` option in the `afp2pdf` section must point to the directory on the server that contains the AFP2PDF Plus Transform client program.

Configuring IBM Content Navigator to work with AFP2PDF Plus Transform

To use the AFP2PDF Plus Transform with IBM Content Navigator (ICN), you must configure the ICN Administrator plug-in.

1. Open the web browser where the ICN plug-ins have been installed and log in to the ICN Administrator plug-in.
2. To configure the installation directory:
 1. On the left-hand side of the browser screen, select **Settings**.
 2. In the main panel, select the **Content Manager OnDemand** tab.
 3. In the **AFP2PDF installation directory** field, enter the fully qualified path name for the directory where the AFP2PDF Plus transform is installed.
 4. Select **Save and Close**.
3. To configure the viewer map:

1. On the left-hand side of the browser screen, select **Default Viewer Map**.
2. Make sure that the **Repository Type** is set to Content Manager OnDemand, **Viewer** is set to AFP2PDF Conversion, and **MIME Type** is set to application/afp.
If any of the values are incorrect, refer to the *Planning, installing, and configuring IBM Content Navigator* manual for more details on how to change these values.
4. Start the AFP2PDF Plus server.

See [Configuring IBM Content Navigator to work with AFP2PDF Plus Transform, p. 19](#) or [Configuring IBM Content Navigator to work with AFP2PDF Plus Transform, p. 19](#) for more details.

3. Architecture and Configuration

- **Architecture**
- **Configuration**
- **AFP2PDF Plus Transform Security**


This chapter describes the overall architecture of the AFP2PDF Plus Client/Server implementation and the files used during the configuration process. It also describes security for the transform.

Architecture

The transform is written in JAVA to take advantage of multi-threaded client/server technology and platform independence. Both a JAVA command line and Application Programming Interface (API) are available.

The transform is also designed to integrate easily with existing installations of IBM Content Manager OnDemand by using the AFP2PDF Plus Transform client programs. These client programs are C/C++ based and unique to each operating system supported by Content Manager OnDemand. They mimic the previous AFP2PDF.exe command syntax and are designed to less integrate into existing AFP2PDF installations with minimal migration effort. [OnDemand Web Enablement and AFP2PDF Plus, p. 21](#) shows details of the OnDemand Web Enablement and AFP2PDF Plus architecture.

OnDemand Web Enablement and AFP2PDF Plus

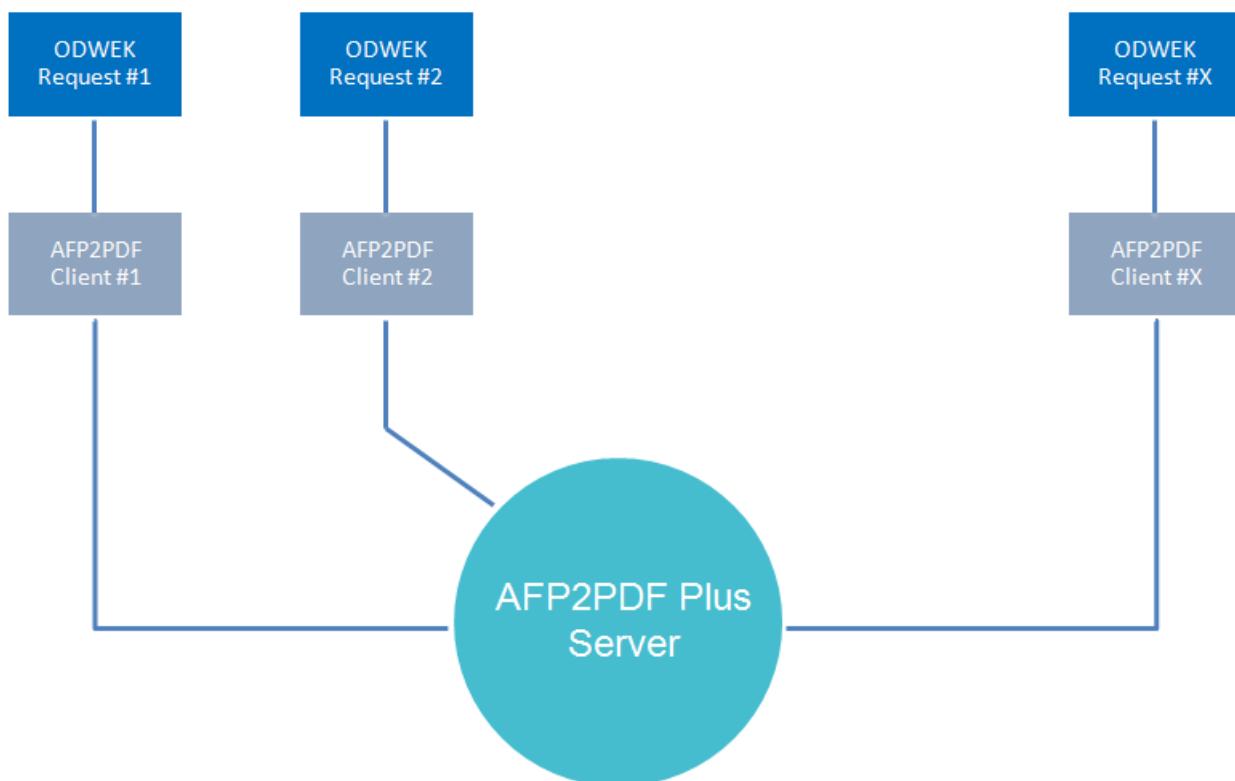

When the OnDemand Web Enablement Kit retrieves an AFP document, it issues a conversion request via the AFP2PDF.exe command-line interface. The AFP2PDF client passes the file to be converted, along with the transform parameters to the AFP2PDF Plus Server (via a TCP/IP socket port), where the file is converted. The AFP2PDF Plus Server writes the results directly back to the specified file system directory. Input requests are handled on a First In First Out (FIFO) basis. The maximum number of client requests handled at any given time depends on the thread count setting in the Server.cfg file.

Configuration

This section describes the commands and files used during the initial configuration process. The basic operation of the AFP2PDF Plus client and server are controlled by three configuration files: Server.cfg, logging.properties, and a2pcclient.cfg.

Note

The directory and file examples in this chapter are specified for the Windows environment. To use these examples in a UNIX environment, use the UNIX file naming convention for any file name. For example, \font\maps in Windows is /font/maps in a UNIX environment, or the input AFP file c:\documents\afpdon.amp in Windows would be /documents/afpdon.amp in a UNIX environment.

3

Configuring the Server.cfg File

The Server.cfg file controls the overall server operation of the AFP2PDF Plus Transform.

The Server.cfg file consists of these entries:

port:n

Indicates the TCP/IP port number that the AFP2PDF Plus client and server use to communicate with one another. It comes preset to 6512, which is currently unassigned in the Service Name and Transport Protocol Port Number Registry, which is administered by the Internet Assigned Numbers Authority (IANA). You can change this port number to one of your own choosing, but be careful that it does not conflict with any others in use in your organization.

socketTimeout:n

Indicates that the sleep time on socket accept in milliseconds. It comes preset to 3000 (3 seconds).

stopFile:filename

Specifies the fully qualified name of the stop server file indicator. As a part of the server shutdown process, StopAFP2PDFServer.bat or StopAFP2PDFServer.sh reads the Server.cfg file for the **stopFile** name and creates it. When the **stopFileTimeout** expires, the server checks for the stop server file indicator and if present, stops the server. The default value is C:\temp\stopServer.txt.

stopFileTimeout:n

Indicates the sleep time between **stopFile** checks in milliseconds. It comes preset to 10000 (10 seconds).

threadCount:n

Indicates the maximum number of AFP2PDF Plus server threads. It comes preset to 3. It can be changed to improve performance, but should not exceed the number of processor cores in your server hardware.

transformHandler:classname

Indicates the name of the AFP2PDF Plus Transform client handler class. This comes preset to com.ricoh.ips.transform.fromAFP.server.AFPPDFClientHandler. The end user should not change this value.

initializationHandler:classname

Indicates the name of the transform initialization class, called once the server starts up. This comes preset to: `com.ricoh.ips.transform.fromAFP.server.AFP2PDFInitializationHandler`. The end user should not change this value.


Configuring the `logging.properties` File

The `logging.properties` file specifies the type of error logging that is turned on for program debugging.

[logging.properties File Structure, p. 23](#) shows its structure, which is designed to allow more transforms to be added in the future.

3

logging.properties File Structure

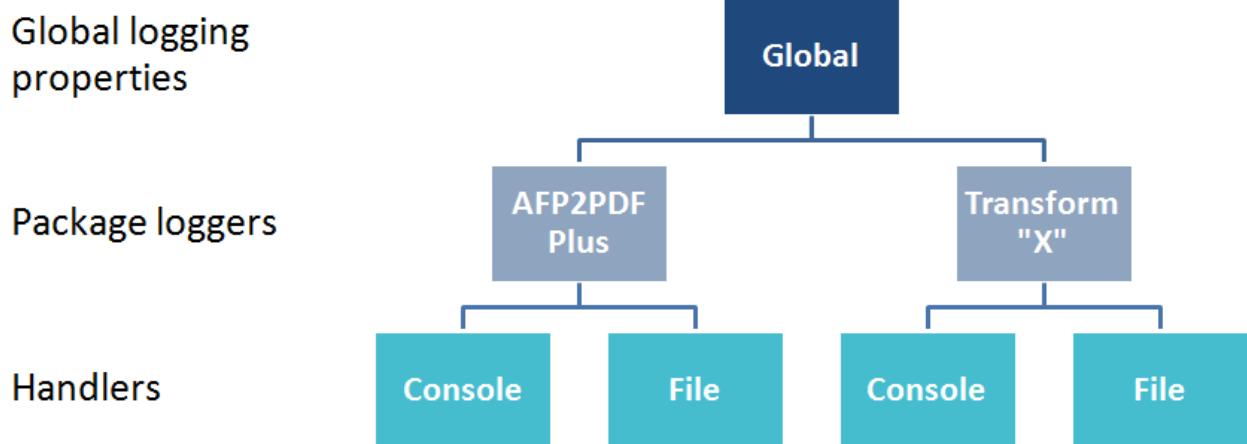

The `logging.properties` file configures the operation of the AFP2PDF Plus logging facility. It consists of these three sections:

Global logging properties

`handlers=classname[,classname]`

Specifies the set of global logging handlers to be loaded upon startup. This comes preset to `java.util.logging.FileHandler,java.util.logging.ConsoleHandler`. The end user should not change this value.

Package loggers

`com.ricoh.ips.transform=INFO | WARNING | SEVERE | ALL | OFF`

Specifies the logging level for the AFP2PDF Plus transform. The default is **ALL**. The end user should not change this value.

Console and file handlers

The console and file handlers operate independently of each other. For example, critical messages could go directly to the console, while other messages are written to the log file.

The console handler has these entries:

java.util.logging.ConsoleHandler.level=INFO | WARNING | SEVERE | ALL | OFF

Indicates the global logging message override setting. The default is **SEVERE**. Change this setting to the level of detail you want to appear on the console.

This value overrides the global logging level, whose default is **INFO**

java.util.logging.ConsoleHandler.formatter=classname

This comes preset to `java.util.logging.SimpleFormatter`. The end user should not change this value.

The file handler has these entries:

java.util.logging.FileHandler.level=INFO | WARNING | SEVERE | ALL | OFF

Indicates the global logging message override setting. The default is **WARNING**. Change this setting to the level of detail you want to appear in the log file.

This value overrides the global logging level, whose default is **INFO**

java.util.logging.FileHandler.append=true | false

Indicates whether trace information is appended to the end of the log file. The default is **true**.

java.util.logging.FileHandler.formatter=classname

This comes preset to `java.util.logging.SimpleFormatter`. The end user should not change this value.

java.util.logging.FileHandler.pattern=filename

Specifies the fully qualified AFP2PDF Plus log file name. It comes preset to `./Afp2Pdf.log`. You can change this value.

java.util.logging.FileHandler.limit=n

Indicates the maximum size of the log file. When the log file reaches this size, it wraps.

java.util.logging.FileHandler.count=n

Indicates the number of log files to cycle through by appending an integer to the base file name.

Configuring the `a2pclient.cfg` File

The `a2pclient.cfg` specifies the port number for the client to server communication.

The `a2pclient.cfg` file consists of:

port:*n*

Specifies the TCP/IP port number that the client uses to communicate with the server. The default port is **6512**. This can be changed, but has to match the server port number in the Server.cfg file.

Note

- This client configuration file is optional.

AFP2PDF Plus Transform Security

The AFP2PDF Plus Transform Encryption supports these Adobe Acrobat security features: encryption and certificate signatures.

3

Encryption

Encryption protects the contents of the PDF document and lets you restrict certain Adobe Acrobat display functions. The Adobe Acrobat password features let users access protected documents and restricted functions.

A PDF document can have these levels of password protection:

- A *document open* password (also known as a *user password*) controls read access to the PDF document.
- A *permissions* password (also known as an *owner* or *master password*) controls the use of restricted functions. See [Parameters, p. 28](#) for information about using the **-a** and **-e** parameters to restrict display functions.

Note

Only Adobe software fully supports and respects these settings. Users of third-party PDF-enabled programs might be able to bypass some of these restrictions.

Both types of passwords can be set for a document. If the PDF document has both types of passwords, it can be opened with either password.

AFP2PDF Plus supports the following encryption algorithms:

- RC4 40-bit
- RC4-128-bit
- AES 128-bit
- AES 256-bit (Default)

RC4 (originally developed by RSA Security) is a symmetric stream cipher: the same algorithm is used for both encryption and decryption, and the algorithm does not change the length of the data. 40-bit and 128-bit refer to the length of the encryption key. 40-bit keys in general are susceptible to "brute force" attacks, which try all possible passwords. The design of the RC4 encryption algorithm does have some vulnerabilities, which tend to make it less secure than AES; but both RC4 40-bit and 128-bit are still used extensively around the world.

The Advanced Encryption Standard (AES) is a specification for the encryption of electronic data established by the U.S. National Institute of Standards and Technology (NIST). The algorithm described

by AES is also a symmetric stream cipher. These ciphers each have a block size of 128 bits, but two different key lengths: 128 bit and 256 bit, hence the terms: AES 128-bit and AES 256-bit. AES is considered more secure because of weaknesses in RC4 keys.

Certificate Signatures

Adobe Acrobat supports the use of *certificate signatures* (also known as *digital signatures*), which let you sign PDF files with a certificate-based digital ID. This certificate ID is issued by a trusted third-part certificate authority, such as CAcert.org or VeriSign.

3

A digital signature can be used to authenticate the identity of a user and the document's content. It stores information about the signer and the state of the document when it was signed. Any subsequent changes to a signed PDF file invalidate the signature.

The AFP2PDF Plus Transform requires a digital certificate in the PKCS#12 format. PKCS stands for Public Key Cryptography Standard, originally developed by RSA Security, Inc. PKCS#12 defines a file format used to store private keys with accompanying public key certificates, protected with a password-based symmetric key.

The AFP2PDF Plus Transform makes use of a digital certificate through the use of one of these options in the a2pxopts.cfg file:

- **Certificate** requires both the name of the PKCS#12 file and its password to read the PKCS#12 file.
- **Certificate2** requires the name of the PKCS#12 file, but lets you point to a file that contains the needed password.

Once the file has been signed, the validity can be checked by opening the file with Adobe Acrobat.

4. Using the AFP2PDF Plus Transform

- Starting and Stopping the AFP2PDF Plus Server on a Windows Server
- Starting and Stopping the AFP2PDF Plus Server on a UNIX Server
- AFP2PDF Plus Transform Command
- AFP2PDF Plus Transform Options File
- Working with AFP Visual Environment Control Files
- Running AFP2PDF Plus in a private Azure Cloud

This chapter describes how to start and stop the AFP2PDF Plus Server and how to run the AFP2PDF Plus Transform client.

Starting and Stopping the AFP2PDF Plus Server on a Windows Server

For Windows operating systems, two programs are supplied:

- StartAFP2PDFServer.bat
- StopAFP2PDFServer.bat

They contain the necessary commands to properly start and stop the JAVA environment, along with the AFP2PDF Plus Server.

Starting and Stopping the AFP2PDF Plus Server on a UNIX Server

For UNIX operating systems, two programs are supplied:

- StartAFP2PDFServer.sh
- StopAFP2PDFServer.sh

They contain the necessary commands to properly start and stop the JAVA environment, along with the AFP2PDF Plus Server.

AFP2PDF Plus Transform Command

The new **afp2pdf** client command is plug-compatible with the previous **afp2pdf** command (5876-W01). It transforms AFP files and resources into PDF files that you can distribute over the Internet and view with a web browser installed with the Adobe Acrobat plug-in. If the plug-in is not installed on your web browser, you can view the PDF files with Adobe Acrobat Reader.

Syntax

Only some of the parameters needed to control the AFP2PDF Plus Transform are available with the client command. The other options are specified in an options file. By default, this file is named **a2pxopts.cfg**. It must reside in the same directory as the client program module. See [AFP2PDF Plus Transform Options File, p. 31](#) for more information about the options file.

The syntax for the **afp2pdf** client command is:

```
afp2pdf [-host host] [-port port] [-a functions -e password] [-f fdeffile]
[-g ( timestamp)] [-i optfile] [-l] [-m] [-n fontpath] [-o outputfile]
[-p page_no] [-r resfile] [-s (timestamp)] [-t rotation] [-u password]
[-v mapfile] inputfile
```

Parameters

-host host

 Note

- The use of **-host** is only allowed for backwards compatibility purposes. However, when used, the transform ignores the host value and replaces it with the **localhost** value.

-port port

Specifies the TCP/IP port number that the client uses to communicate with the server. The default port is **6512**. This can be changed, but has to match the server port number in the **Server.cfg** file.

 Note

- This parameter overrides any existing **port:n** specified in the optional **a2pc1ient.cfg** file.

-a functions

When used with an owner password (**-e password**), specifies which PDF display functions are restricted. The codes for the display functions, which can be used in any order, are:

a

Add or modify text annotations and interactive form fields.

c

Modify the document contents.

d

Assemble the document by using options such as inserting, rotating, or deleting pages. You can also create bookmarks or thumbnail images.

i

Fill in existing interactive form fields.

p

Print the document.

q

Print the document using low quality settings.

s

Copy text and graphics from the document.

-e password

Specifies an alphanumeric password that gives permission to change document security settings (also known as a *master*, *owner*, or *document open* password). For example, if the printing function in the PDF display is restricted (-a p), you must supply a password to override the setting.

-f fdeffile

Specifies the fully qualified file name of the form definition resource that is used when transforming an AFP file. For example, `afp2pdf -f c:\mydirectory\myformdef.fde` `afpfile.afp`.

-g (timestamp)

Sets a time stamp for when the document was created.

 **Note**

This command can be specified, but is not supported in the current implementation. It exists for compatibility purposes only.

The format of the time stamp is:

`YYYYMMDDHHmmSSOHH' mm'`

where:

- `YYYY` is the year.
- `MM` is the month.
- `DD` is the day (01-31).
- `HH` is the hour (00-23).
- `mm` is the minute (00-59).
- `SS` is the second (00-59).
- `O` is the relationship of local time to Universal Time (UT), denoted by one of the characters `+`, `-`, or `Z`.
- `HH` is the absolute value of the offset from UT in hours (00-23).
- `mm` is the absolute value of the offset from UT in minutes (00-59).

For example, December 23, 1998, at 7:52 PM, U.S. Pacific Standard Time, is represented by the string `19981223195200-08'08'`.

4

-i optfile

Specifies the location and name of the transform options file. The default is `a2pxopts.cfg` in the same directory as the program module. This file name must not use relative paths and must be fully qualified. See [AFP2PDF Plus Transform Options File, p. 31](#) for more information about the options file.

-l

Turns off all the generated error and informational console messages and sends them to the `afp2web.err` log file.

 **Note**

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

AFP2PDF Plus error logging is controlled by the `logging.properties` file. For information about this file, see [Configuring the logging.properties File, p. 23](#).

-m

Generates a linearized PDF (or Fast Web View PDF) that reorganizes the data for more efficient processing in a network environment. When specifying this parameter, large PDF files are displayed without long download delays.

 **Note**

To use this parameter, verify that the Web server or Web application sending the PDF data over the network provides the page-by-page or "byte-serving" downloading function.

-n fontpath

Specifies the location of the font definition files needed by the transform. The default is the \font subdirectory of the directory where the transform modules are installed.

-o outfile

Specifies the location and file name of the output PDF file. The default has the same location and name as the input file, but with a file extension of .pdf. For example, when the PDF is generated from an AFP file named afpdoc.aff, a file named afpdoc.pdf is created.

-p page_no (-page_no2)

Specifies a page number or a page range to be transformed in the AFP document.

-r resfile

Specifies the fully qualified file name of the AFP resource group to be used when transforming the AFP file. For example, afp2pdf -r c:\mydirectory\afpresfile.res afpfile.aff.

-s (timestamp)

Sets a time stamp for when the document was signed.

 **Note**

This command can be specified, but is not supported in the current implementation. It exists for compatibility purposes only.

The format of the time stamp is:

`YYYYMMDDHHmmSSOHH' mm'`

where:

- *YYYY* is the year.
- *MM* is the month.
- *DD* is the day (01-31).
- *HH* is the hour (00-23).
- *mm* is the minute (00-59).
- *SS* is the second (00-59).
- *O* is the relationship of local time to Universal Time (UT), denoted by one of the characters +, -, or Z.
- *HH* is the absolute value of the offset from UT in hours (00-23).
- *mm* is the absolute value of the offset from UT in minutes (00-59).

For example, December 23, 1998, at 7:52 PM, U.S. Pacific Standard Time, is represented by the string 19981223195200-08'08'.

-t rotation

Specifies the rotation value to use when transforming the file. Valid values are **0**, **90**, **180**, and **270**. The default is **0**.

Some AFP files might have already been formatted with a rotated orientation. In this case, use this parameter to align the text in an upright position.

Note

- The transform applies the rotation to the entire page, including new images added with image mapping.

-u password

Specifies an alphanumeric password that gives permission to open the PDF document (also known as a *user* or *document open* password).

-v mapfile

Specifies the location and the name of the image map configuration. This file name does not use relative paths and is fully qualified. See [Parameters, p. 28](#), for more information about the image map configuration file.

inputfile

Specifies the AFP input file that is to be transformed to PDF. This parameter is required.

Return Codes

The **afp2pdf** client command returns one of these values:

0

The transform completed successfully.

Nonzero

An error occurred.

AFP2PDF Plus Transform Options File

Parameters to control settings for the AFP2PDF Plus Transform are specified in an options file. By default, the name of this file is `a2pxopts.cfg`. When running the transform function with the **afp2pdf** client command-line program, the options file must reside in the same directory as the program module.

If running the transform function from the API, you can locate the options file in any directory on the system and you can use any file name. By setting the **szOptionsFile** option in the structure passed to the transform function, you can specify different option files for different types of documents.

 **Note**

- The format of the a2pxopts.cfg file has changed. All available options are listed in the file, along with an explanation of each option. Uncomment the option you wish to use and add any required parameters. Where appropriate, you can manually specify multiple options of the same type. See [Comparison with AFP2PDF Transform, p. 91](#) for a comparison list of AFP2PDF vs. AFP2PDF Plus transform options.
- Parameters in the options file must be specified on separate lines and have the format `parameter=value`. For example:

```
Disable_Compression=True
Auto_Rotate=True
```

- Variable text should be enclosed in double quotes if the value contains blanks. For example, `Subject="Advance Function Presentation"`.
- Parameters and values are not case-sensitive.
- Lines starting with a semicolon (;) or a pound (#) character are comments.
- Previous versions of the options file work with AFP2PDF Plus.

4

The AFP2PDF Plus Transform option parameters are:

Append_PDF_File=file,n,[tm1 tm2 tm3 tm4 tm5 tm6]

Indicates where or how the first page of the specified PDF file is appended to the generated PDF file, where:

file

Specifies the name and location of the PDF file that is to be appended to the generated PDF file.

n

Specifies where the PDF is appended or if the PDF is used as a background form or overlay. Values are:

0

Appended to the beginning of the generated file.

1

Appended to the end of the generated file.

2

Used as a preprinted form on all pages of the generated file.

3

Used as a preprinted form on even pages of the generated file.

4

Used as a preprinted form on odd pages of the generated file.

5

Used as a preprinted form on the first page of the generated file.

6

Used as a preprinted form on all pages of the generated file, except for the first page.

7

Used on top of the content from all pages of the generated file.

8

Used on top of the content from the even pages of the generated file.

9

Used on top of the content from the odd pages of the generated file.

10

Used on top of the content from the first page of the generated file.

11

Used on top of the content from all pages of the generated file, except for the first page.

tm1 tm2 tm3 tm4 tm5 tm6

Specifies the linear transformation matrix values that define the origin, rotation, or scale of the appended PDF file. For example:

1 0 0 1 *ox oy*

Specifies origin changes, where:

ox

Specifies the distance to translate the horizontal dimension.

oy

Specifies the distance to translate the vertical dimension.

sx 0 0 sy 0 0

Specifies scaling changes, where:

sx

Specifies the scale factor (1.0-100%) for the horizontal direction.

sy

Specifies the scale factor (1.0-100%) for the vertical direction.

cos θ sin θ -sin θ cos θ 0 0

Specifies rotation changes by an angle θ counterclockwise.

The origin for this operation is the bottom left-hand corner of the page.

For example, `Append_PDF_File=C:\term.pdf,0` appends the `c:\term.pdf` file to the beginning of the generated PDF file, while `Append_PDF_File=C:\term.pdf,1` appends the `c:\term.pdf` file to the end of the generated PDF file.

`Append_PDF_File2=file,n,[tm1 tm2 tm3 tm4 tm5 tm6]"`

Indicates where or how the first page of the specified PDF file is appended to the generated PDF file. This parameter is the same as **Append_PDF_File** except that the origin is the top left-hand corner of the page

Author=name

Specifies 1–62 characters for the author name in the Info Dictionary of the output PDF file. This information is displayed to the user if the **File** → **Properties** function is selected in Adobe Acrobat.

Auto_Rotate=True | False

Indicates whether the transform determines the orientation of each page and rotates it so that the text appears right-side up. By default, the AFP document is converted as is, so if the AFP page is formatted in a rotated orientation, the output PDF is also rotated. Setting this parameter to **True** is useful when pages in a document are rotated with different orientations.

Auto_Rotate_CountBlanks=True | False

Indicates whether blanks are counted in the auto-rotate algorithm. This parameter is used only with **Auto_Rotate=True**.

Auto_Rotate_ParseOverlays=True | False

Indicates whether page overlays are parsed in the auto-rotate algorithm. This parameter is used only with **Auto_Rotate=True**.

Auto_Rotate_UseCharacterRotation=True | False

Indicates whether character rotation is used along with the text orientation in the auto-rotate algorithm. This parameter is used only with **Auto_Rotate=True**.

AVE_Control_File=filename

Specifies the fully qualified name of the AFP Visual Environment control file. This control file contains the names and parameters of the Pipeline Manager filter programs to be run on the AFP before conversion to PDF. See [AFP2PDF Plus Transform Options File, p. 31](#) for information about their use.

Bookmarks_Csname=font character set name[, font character set name...]

Specifies that bookmarks are created from strings of text that use the font character sets listed.

You can include multiple values, but they must be separated by commas. For example, **Bookmarks_Csname="COFONT01", "COFONT02"**.

When **Bookmarks_Csname** is specified and a match is found, **Show_Pageids** is ignored.

For more information on bookmarks, see the description of **Disable_Bookmark_Generation**.

Cache_AFP_Overlay=True | False

Indicates whether AFP overlays are saved during transformation. The default setting this parameter is **True**, which can result in a smaller PDF file and a faster conversion.

Capture_Files_For_Debug=directory

Specifies the directory where an archive file can be created that contains the captured job information, such as:

- the input and the output files;
- the debugging log file specified in the [AFP2PDF Plus Transform Options File, p. 31](#) **Logging** parameter;

- the contents of the font directory;
- the AFP2PDF Plus options file;
- the contents of the directories specified in the [AFP2PDF Plus Transform Options File, p. 31](#) **PfmPfb_Directory** parameter, the [AFP2PDF Plus Transform Options File, p. 31](#) **TrueType_Directory** parameter, and the **Locale_Path** [AFP2PDF Plus Transform Options File, p. 31](#) parameter;
- the files specified in the [AFP2PDF Plus Transform Options File, p. 31](#) **Append_PDF_File** parameter, [AFP2PDF Plus Transform Options File, p. 31](#) **Append_PDF_File2** parameter, and the [AFP2PDF Plus Transform Options File, p. 31](#) **Concatenate_PDF_File** parameter;
- the imagemap file from the **-V** [command line parameter, p. 28](#) or the **setImageMapFile** API; For more information on AFP2PDF Plus Transform APIs, see [JAVA Application Programming Interfaces, p. 87](#).
- the images specified in the **imagemap** file;
- the external form definition from the **-f** [command line parameter, p. 28](#) or the **setFormDef** API;
- the external AFP resource group file from the **-r** [command line parameter, p. 28](#) or **A2PDocStart2** API;
- any AFP resources used in the conversion of the input file.

In the directory specified on this parameter, a new subdirectory is created for the job, that contains an archive file, both using a name derived from the input file name.

Certificate=pkcs12_file, pkcs12_password[, cache_directory]

Specifies the PKCS#12 certificate file used to sign the document, where:

pkcs12_file

Specifies the fully qualified path name of the PKCS#12 certificate file.

pkcs12_password

Specifies the password needed to read the PKCS#12 file.

cache_directory

Specifies the fully qualified path to a directory that is used for certificate storage. This is an optional value that can be used to improve the performance of the conversion.

Certificate2=pkcs12_file, pwd_file[, cache_directory]

Specifies the PKCS#12 certificate file used to sign the document.

pkcs12_file

Specifies the fully qualified path name of the PKCS#12 certificate file.

pwd_file

Specifies the fully qualified path name of a file that contains the password needed to read the PKCS#12 certificate file.

cache_directory

Specifies the fully qualified path to a directory that is used for certificate storage. This is an optional value that can be used to improve the performance of the conversion.

Color=afpname, red, green, blue

Specifies the RGB value color setting that overrides the display of named color values in the AFP OCA (graphics objects), where:

afpname

Specifies one of the colors defined in AFP: BLUE, BROWN, CYAN, DARKBLUE, DARKCYAN, DARKGREEN, GREEN, GREY, HIGHLIGHT0, HIGHLIGHT1, HIGHLIGHT2, HIGHLIGHT3, MAGENTA, MUSTARD, ORANGE, PURPLE, RED, WHITE, YELLOW.

red**green****blue**

Specifies the RGB value settings in the range of 0 to 255.

4

For example, the AFP named color BLUE changes to a light gray color with these values: Color=BLUE, 220, 220, 220.

To override text (PTOCA) named color values, include **Modify_Text_Colors**. For more information, see the **Modify_Text_Colors** parameter.

To override bar code objects (BCOCA) named color values, include **Modify_BCOCA_Colors**. For more information, see the **Modify_BCOCA_Colors** parameter.

Concatenate_PDF_File=file

Indicates that the entire specified PDF file is appended to the end of the generated PDF file, where:

file

Specifies the name and location of the PDF file that is to be appended to the generated PDF file.

Convert_Text_CMYK=True | False | Legacy

Indicates whether all AFP text defined with the CMYK color space are converted to the RGB color space in the PDF output, when the **Preserve_CMYK** parameter is not specified or set to false. Valid values for this parameter:

- **False**: for no conversion.
- **True**: converts color space values from CMYK to RGB.
- **Legacy**: uses the CMYK to RGB formula from the legacy AFP2PDF transform.

See **Preserve_CMYK** for more information on the AFP image conversion to RGB.

Creator=name

Specifies 0–62 characters for the creator name in the Info Dictionary of the output PDF file. This information is displayed to the user if the **File → Properties** function is selected in Adobe Acrobat.

 **Note**

- If the **Creator** parameter is included into the options file, but contains an empty value, then the **Creator** property in the output PDF file is also empty.
- If no **Creator** parameter is included into the options file, the output PDF document uses the name and the version of the AFP2PDF Plus transform, by default.

DASH_PATTERN_style="on off... phase"

When using GOCA lines, adjusts the dash pattern used. The values are:

style

Indicates the dash pattern that is used. The values are:

DASH Specifies a dash pattern (-----).

DASHDOT Specifies a dash dot pattern (-.-.-).

DASHDOTDOT Specifies a dash dot dot pattern (-.-.-.-).

DBLDOT Specifies a double dot pattern (.).

DOT Specifies a dot pattern (.....).

LONGDASH Specifies a long dash pattern (_ _ _ _).

SOLID Specifies a solid line pattern (_____).

on

Specifies the dash pattern length in 1/72 units per inch.

off

Specifies the spacing length between the dash pattern.

phase

Specifies the distance to start in the dash pattern.

The *on* and *off* values are optional. When used, the pair can be specified multiple times. For example:

"[] 0" specifies a solid line.

"[0.2 0.4] 0.4" specifies a dash pattern length of 0.2 units, a spacing length between the dash pattern of 0.4 units, and a start pattern at 0.4 units from the beginning of the pattern.

"[0.5 1 0.5 2] 0" specifies a dash pattern length of 0.5 units, a spacing length between the dash pattern of 1 unit, a dash pattern length of 0.5 units, a spacing length between the dash pattern of 2 units, and a start pattern at the beginning of the pattern.

DASH_PATTERN_ENDCAP=[BUTT, ROUND, SQUARE]

Specifies the mode that is used at the end of the line patterns. The values are:

BUTT

Specifies a line that is squared off at the endpoints

ROUND

Specifies a line that has semicircular arcs (with a diameter equal to the line width) drawn around the endpoints. This is the default.

SQUARE

Specifies a line that is extended beyond the endpoints for half of the line width and then squared off.

Default_Encryption_Permissions=[Acrobat_functions[,n [,encryption_functions]]]

Sets one or more default encryption permissions to be used when encrypting the PDF output. The permission codes are:

Acrobat_functions

a

Adding or changing annotations or form fields in Acrobat is denied.

c

Changing the document in Acrobat is denied.

p

Printing the document in Acrobat is denied.

s

Selecting and copy text and graphics in Acrobat is denied.

n

Specifies the level of encryption:

5

RC4 128-bit encryption

6

AES 128-bit encryption

7

AES 256-bit encryption

encryption_functions

You can set one or more of these codes with 128-bit and 256-bit encryption:

e

Extracting text and graphics in Acrobat is denied.

d

Assembling text and graphics in Acrobat is denied.

i

Editing form fields in Acrobat is denied.

q

Printing high quality in Acrobat is denied.

 **Note**

- Using RC4 128-bit encryption produces a file that can only be opened with Acrobat 5.0 or later.
- Using AES 128-bit encryption produces a file that can only be opened with Acrobat 7.0 or later.
- Using AES 256-bit encryption produces a file that can only be opened with Acrobat 10.0 or later.
- Codes **5**, **6**, and **7** can be used in combination with one of the **a**, **c**, **p**, or **s** codes to force 128-bit or 256-bit encryption without setting the **i**, **e**, **d**, or **q** codes.

Default_Linearization=True | False

Indicates whether the PDF output file is linearized (or enabled for Fast Web Viewing).

See the **-m** parameter from [Parameters, p. 28](#) for more information about linearization.

4

Default_Owner_Password=password

Specifies a default alphanumeric owner encryption password.

Default_User_Password=password

Specifies a default alphanumeric user encryption password.

Disable_Bookmark_Generation=True | False

Indicates whether PDF bookmarks are created. If page level indexing information is available in the input AFP document, PDF bookmarks are automatically generated. If you do not want bookmarks created, set this parameter to **True**.

Disable_Compression=True | False

Indicates whether the transform compresses PDF data. Setting this parameter to **True** to turn off compression can be useful when trying to determine problems that might exist in the PDF output file.

Disable_TTF_subsetting=True | False

Indicates whether TrueType fonts are subsetted.

DotDensity, patternid,afpcolorname=red,green,blue

Specifies the RGB value color setting for the AFP GOCA pattern that is used to fill the interior of an area, where:

patternid

Specifies the GOCA pattern identifier, which defines various dot fill patterns of varying density. Pattern ID supports values from 1 to 8.

afpcolorname

Specifies one of the pattern foreground colors defined in AFP: BLACK, BLUE, BROWN, CYAN, DARKBLUE, DARKGREEN, DARKTURQUOISE, DEFAULT, GREEN, GREY, MAGENTA, MUSTARD, ORANGE, PURPLE, RED, WHITE, YELLOW.

red

Specifies the red value settings in the range of 0 to 255.

green

Specifies the green value settings in the range of 0 to 255.

blue

Specifies the blue value settings in the range of 0 to 255.

For example: **DotDensity,5,GRAY=220,220,220** specifies the RGB value of 220, 220, 220 for GOCA pattern 5 with a grey foreground color.

Enable_Auto_Font_Image=True | False

Indicates whether a font is mapped automatically. Setting this parameter to **True** causes the font to be converted to image data if the font resources exist and a font mapping does not exist.

Enable_Auto_Image_Cache=True | False

Indicates whether images are saved.

FIPS_Mode=True | False

Indicates whether the transform functions in an environment that is compliant with the Federal Information Processing Standard (FIPS). When set to **True**, encryption options and digital certificate options are disabled. For example, any request to add user passwords or owner passwords to the PDF file and any attempt to digitally sign a PDF file are ignored.

Flate_Compression_Level=n

Specifies the level of the Flate compression used in the PDF file, where *n* is 0 to 9. The larger the number the longer the conversion takes, but a smaller PDF file should be created. The default is 6.

FontExt=*.extension

Specifies the file extension that the transform uses to search for font resources in resource directories. For example, if **FontExt=*.EXT** and the AFP document reference a font named C0FONTCS, the transform searches for a file named C0FONTCS.EXT in the resource directories.

Note

- The *extension* value is case-sensitive on most operating systems.
- If you add this parameter to the configuration file, the transform starts the search with the customized extension. If not set or not found, AFP2PDF Plus searches for the file extension by default, using this search order: no extension, **.0LN**, **.FONT0LN**, **.240**, **.FONT3820**, **.FONT38PP**, **.CFT**, **.CDP**, **.300**, **.FONT300**.

Font_Path=directory

Specifies the base directory that the transform users to search for the font configuration files. By default, this base directory is the **\font** subdirectory where the transform modules were installed. If the parameter is used when the font configuration files have been moved to a different location, the same directory structure of the font configuration files must be preserved. For example, if this entry was given: **Font_Path=c:\fontfils**, the code page map files must reside in the **c:\fontfils\maps** directory.

Generate_Type3=True | False

Indicates whether Type 3 fonts are generated in the PDF output instead of the raster images of font characters. Type 3 fonts are raster fonts that can be used to display the exact AFP raster font characters. For more information, see [AFP2PDF Plus Transform Options File, p. 31](#).

 **Note**

- If the AFP font was generated with the standard AFP Graphic Character Global Identifiers (GCGIDs), the Type 3 font uses the searchable text. You can use the text search function in a PDF to find any text that uses a Type 3 font and standard IDs.

Global_Scale= *n.n*

Applies a scaling factor to all the data on the page relative to the paper or media represented in the PDF. For example, a scale of 50.0 reduces the data in half relative to the page. The accepted values are between 0 and 6400. The default value is **100.0**.

GOCA_Color_Of_Medium= **White** | **Transparent**

Specifies how to treat the color of medium color in AFP Graphics Object Content Architecture (GOCA). The options are **White** and **Transparent**. The default value is **White**.

GOCA_Pattern= *patternid, var1, var2*

Specifies the characteristics for the AFP Graphics Object Content Architecture (GOCA) pattern that is used to fill the interior of an area, where:

patternid

Specifies the GOCA pattern identifier, which defines various line fill patterns. Pattern ID supports values from 9 to 14.

var1

Defines the line width.

var2

Defines the line spacing.

For example: **GOCA_Pattern=9,10,250** specifies GOCA pattern 9 with a line width of 10 and a line spacing of 250.

GOCA_Use_Circles= **True** | **False**

Indicates whether the transform uses circles or dots for GOCA patterns 1 through 8, instead of shaded areas. Setting this parameter to **True** increases the PDF file size.

 **Note**

- **DotDensity** overrides the **GOCA_Use_Circles** setting, for the **DotDensity** specific pattern.

Honor_Constant_Forms= **True** | **False**

Indicates whether the transform generates extra pages created from the constant forms control function, which is a function in AFP architecture that produces one or more static overlays on a page without variable data from the print file.

Honor_Medium_Orientation= **True** | **False**

Indicates whether the transform applies the medium orientation specified in the form definition to created PDF pages.

Horizontal_Offset= *n*

Applies a horizontal offset to all the data on the page relative to the paper or media represented in the PDF. The units of this setting are 1440 units per inch.

Ignore_Bar_Code_Object_Area_Size=True | False

Indicates whether the object area size of a bar code object is ignored when checking if the generated bar code symbol fits within a specified area. By default, the object area size of the bar code is used to check if the generated bar code symbol is larger than the specified area to fit.

 **Note**

- Setting this parameter to **True** ignores the area size of the bar code object and increases the size of the bar code symbol.

Ignore_Data_Font_Height=True | False

Indicates whether the transform ignores the font height. By default, the transform uses the font height value specified in the AFP data. If this parameter is set to **True**, the font height setting in the AFP data is ignored and the font size specified in the font configuration file `csdef.fnt` is used.

4

Ignore_PTOCA_STC=True | False

Indicates whether the color specified with the Set Text Color (STC) control to display text in Presentation Text Object Content Architecture (PTOCA) is honored. When **True** is specified, the STC-specified color is ignored and black is used.

ImageMapEntries_File=file,[True | False]

Specifies the file that the transform uses to output the image information from the AFP file. The information in this file can then be modified and passed as input back into the transform function to change the conversion method for individual AFP images. The optional flag after the file specifies whether MD5 checksums for images are generated. The checksums can also be used as matching criteria with image mapping. The default value is `False`. See [Mapping AFP images, p. 75](#) for more information about the mapping images.

JPEG_Quality_Level=n

Specifies the JPEG quality level, where 0.0 is the least quality and maximum compression and 1.0 is the best quality with no compression. The default is 0.95. This parameter only affects RGB images.

Keywords=text

Specifies 1 to 120 characters for the **Keywords** entry in the Info Dictionary of the output PDF file. This information is displayed to the user if the **File → Properties** function is selected in Adobe Acrobat.

Layer=n

n

Specifies the default layer where **Shaded_Area** is placed, in relation to the text of the enclosing AFP object. Values are:

1

Bottom: Place **Shaded_Area** under the entire text.

2

In-place: Place **Shaded_Area** in the same position as the image that it is replacing.

3

Top: Place **Shaded_Area** on top of the entire text.

Legacy_Font_Map=True | False

If you specify **True**, AFP2PDF Plus uses the font mapping process from the legacy AFP2PDF transform.

Locale_Path=path

Specifies the path location of the locale-specific information files needed during the transform process. Only use this parameter when converting multiple-byte language files (Traditional Chinese, Simplified Chinese, Japanese, Korean, or Unicode).

Logging=[True | Append | Jobname], logDir, lvl

Specifies the type of tracing that is turned on for program debugging and where the log file is located.

Parameter options:

- When set to **True**, logging traces on a document boundary and overwrites the trace data from a previous document in the log file. For **True** and **Append** options, the log file name is **Afp2Pdf.log**.
- When set to **Append**, the logging process appends data to the end of the log file.
- When set to **Jobname**, the logging process creates a new log file for each job processed. The new log file name concatenates the input file name and **-Afp2Pdf.log** together. For example, for the **TestLog.amp** input file, the resulting log file is **TestLog.amp-Afp2Pdf.log**.
- The **logDir** setting specifies the fully qualified directory where the log file is saved. The log file name is **Afp2Pdf.log**.
- The **lvl** setting specifies the log level: **SEVERE**, **WARNING**, or **INFO**. This command overrides the settings in the **logging.properties** file.

Modify_BCOCA_Colors=True | False

Indicates whether RGB value color settings override the display of named color values in the AFP Bar code objects (BCOCA). For more information, see the **Color** parameter.

Modify_Text_Colors=True | False

Indicates whether RGB value color settings override the display of named color values in the AFP text (PTOCA). For more information, see the **Color** parameter.

Output_IndexInfo=True | False

Indicates whether the group level index information of the document is placed as a bookmark with this format:

```
index attribute : index value
```

Other applications processing the PDF file can search for the bookmark text.

 **Note**

- If the parameter is set to **True** on password protected files, the bookmark text becomes encrypted.

Output_IndexInfo2=True | False

Indicates whether the group level index information of the document is placed as a bookmark with this format:

index attribute	index value1	index value2
-----------------	--------------	--------------

Other applications processing the PDF file can search for the bookmark text.

 **Note**

- If the parameter is set to **True** on password protected files, the bookmark text becomes encrypted.
- This parameter overrides **Output_IndexInfo**, if both **Output_IndexInfo** and **Output_IndexInfo2** are specified.

OverlayExt=*.extension

Specifies the file extension that the transform uses to search for overlay resources in resource directories. For example, if **OverlayExt=*.OVE** and the AFP document reference an overlay named O1OVERLY, the transform searches for a file named O1OVERLY.OVE in the resource directories.

4

 **Note**

- The *extension* value is case-sensitive on most operating systems.
- If you add this parameter to the configuration file, the transform starts the search with the customized extension. If not set or not found, AFP2PDF Plus searches for the file extension by default, using this search order: no extension, **.OVLY3820**, **.OVLY38PP**, **.OVL**, **.OLY**.

Page_rotation=0 | 90 | 180 | 270

Specifies the rotation value to use when transforming the file. Some AFP files might have already been formatted with a rotated orientation. In this case, you must use this parameter to align the text in an upright position.

Page_Count_Output=file

Specifies the location of the output file that stores the number of pages transformed for each job. The output file contains the values in a comma-separated value (CSV) format. By default, the transformed page numbers are not saved.

 **Note**

To create the output file, the transform must have write permissions on the specified location.

PageSegExt=*.extension

Specifies the file extension that the transform uses to search for page segment resources in resource directories. For example, if **PageSegExt=*.SEG** and the AFP document reference a page segment named S1PAGSEG, the transform searches for a file named S1PAGSEG.SEG in the resource directories.

 **Note**

- The *extension* value is case-sensitive on most operating systems.
- If you add this parameter to the configuration file, the transform starts the search with the customized extension. If not set or not found, AFP2PDF Plus searches for the file extension by default, using this search order: no extension, **.PSEG3820**, **.PSEG38PP**, **.PSG**, **.PSE**.

PDF/A=True | False [,conformance level]

Indicates whether the transform generates output that conforms to the PDF/A-1b, PDF/A-2b, or PDF/A-3b specification. The accepted values for the optional parameter **[conformance level]** are **1b**, **2b**, or **3b**.

 **Note**

The default conformance level is **1b** when the value is missing or the value specified after **True** is not accepted.

When this parameter is set to **True**, these conditions must be met for the transform to generate output that conforms to the specification:

- All fonts must be embedded for PDF/A-1b, PDF/A-2b, or PDF/A-3b compliance. See [AFP2PDF Plus Transform Options File, p. 31](#) for information about embedding fonts; see [AFP2PDF Plus Transform Options File, p. 31](#)
- The PDF file must not contain any passwords or encryption; therefore, none of the functions described in [AFP2PDF Plus Transform Options File, p. 31](#) should be used when this parameter is set.

PER_JOB_IMAGE_CACHE=True | False

Indicates if images are cached at job level. Depending on the job content, if this option is set to true, the performance is improved, but it also uses extra memory.

PfmPfb_Directory=directory

Specifies the directory that the transform uses to search for PFB and PFM (or AFM) files when mapping AFP fonts to Type1 fonts. If not set, the default directory is "Font_Path/Type1".

Preserve_CMYK=True | False | Legacy

Indicates if all AFP images are converted to the RGB color space in the PDF output. Valid values for this parameter:

- **False**: for no AFP image conversion.
- **True**: preserves AFP images defined with the CMYK color space so that they are not converted to RGB.
This parameter uses a compression in the PDF that does not cause any loss of color quality.
- **Legacy**: uses the CMYK to RGB formula from the legacy AFP2PDF transform.

Producer=name

Specifies 0-62 characters for the producer name in the Info Dictionary of the output PDF file. The information is displayed when the *Properties* function under *File* is selected in Adobe Acrobat.

 **Note**

- If the **Producer** parameter is included into the options file, but contains an empty value, then the **Producer** property in the output PDF file is also empty.
- If no **Producer** parameter is included into the options file, the output PDF document uses the name and the version of the AFP2PDF Plus transform, by default.

PTX_Drawrule_Use_Line=True | False

Indicates whether the transform uses line operators in the generated output for PTX draw rules (DIR and DBR). When this parameter is set to **False**, the system uses rectangle operators. For some PDF

viewers this can impact the way the thin lines are rendered at different zoom levels. The default value is **False**.

Resize_Page_with_Offsets=True | False

This parameter affects only the AFP page size values used for the output PDF page. When set to **True**, any offsets specified in the form definition and in the **Horizontal_Offset** and **Vertical_Offset** parameters are added to the AFP page width and AFP page length.

The sizes of the output PDF page are determined by the values from the Medium overlay size, the AFP page size or the **Static_Paper_Width** and **Static_Paper_Length** parameters:

The width of the output PDF page

If the **Static_Paper_Width** parameter is specified, the output PDF page width is set by that value. If **Static_Paper_Width** is not specified, the larger of the Medium overlay width and AFP page width determines the output PDF page width.

4

The length of the output PDF page

If the **Static_Paper_Length** parameter is specified, the output PDF page length is set by that value. If **Static_Paper_Length** is not specified, the larger of the Medium overlay length and AFP page length determines the output PDF page length.

Resource_Cache_Size=n

Specifies the maximum number of non MODCA image resources and PDF resources each to be cached for the duration of a transform job. Values below 1 will result in constant cache misses that can negatively affect performance.

ResourceDataPath=directory[;directory]

Specifies the directories that the transform uses to search for AFP resources. You can specify multiple directories, but they must be separated with a semicolon (;). See [AFP2PDF Plus Transform Options File, p. 31](#) for more information.

Shade_RGB=red, green, blue

Specifies the intensity of the red, green, and blue colors when generating the color of shaded areas. The color values are in the range of 0.0 to 1.0, with 0.0 for black and 1.0 for white. For example: `Shade_RGB=0.5, 0.5, 0.5`.

See [AFP2PDF Plus Transform Options File, p. 31](#) for more information about shaded areas.

Show_Outline=True | False

Indicates whether the outline window is displayed. If an AFP document contains index data, the transform converts this index information into PDF outline and bookmark functions. If the output PDF file contains any bookmark information, the outline window is always displayed when viewed with Adobe Acrobat. This parameter can be set to **False** so the outline window is not displayed.

Show_Pageids=True | False

Indicates whether the Page Identifier values are displayed in the bookmark pane.

Static_Paper_Length=n

Overrides the AFP logical page size used by the default for the page or media dimensions represented in the PDF. Using 72 units per inch, you can set a specific paper length for the entire document.

Static_Paper_Width=n

Overrides the AFP logical page size used by the default for the page or media dimensions represented in the PDF. Using 72 units per inch, you can set a specific paper width for the entire document.

Subject=text

Specifies 1–62 characters for the Subject entry in the Info Dictionary of the output PDF file. This information is displayed to the user if the **File → Properties** function is selected in Adobe Acrobat.

Substitute_Default_Medium_Map_Allowed=True | False

Allows the use of the default Medium Map when processing the AFP pages, if the Medium Map requested with the Invoke Medium Map (IMM) or Begin Page (BPG) structured field is not found in the active form definition.

Title=text

Specifies 1–62 characters for the Title entry in the Info Dictionary of the output PDF file. This information is displayed to the user if the **File → Properties** function is selected in Adobe Acrobat.

Transform_All_Subgroups=True | False

Specifies whether the transform converts all of the subgroup formatting from the AFP form definition resource. By default, the transform processes the first subgroup.

TrueType_Directory=directory

Specifies the directory that the transform uses to search for TrueType font files when mapping AFP fonts to TrueType fonts. If not set, the default directory is "Font_Path/TrueType".

Type3Glyph_Position_Legacy=True | False

Specifies whether the glyph is positioned using the formula from the legacy AFP2PDF transform, when positioning Type3 font glyphs.

When set to **True**, the transform uses the legacy glyph positioning formula.

UDC_Range=low1,high1[,low2,high2][,low3,high3][,low4,high4]

Specifies one to four section ranges that the transform can search when processing user-defined characters for double-byte character set (DBCS) text. The ranges restrict which DBCS sections are searched, which causes the transform to run more efficiently.

For example, if the user-defined characters are present in sections 129, 130, and 131, the parameter can specify these low and high sections: UDC_Range=129,131.

Use_AFP_Metrics=n

Specifies a number that tells the transform to use the AFP font metrics instead of the mapped font metrics. For example, **Use_AFP_Metrics=255**. With this option the transform uses the AFP font metrics instead of the metrics of the mapped font.

See [Using AFP metrics in mapped font, p. 72](#) for more information.

Use_Default_Hash_Code=True | False

Specifies whether the transform uses a default method to determine if two page segments or overlays are identical, based on the resource name and content. The alternative is an optimized method where two overlays are equal when they have the same content, even if they are named differently. Setting this to **True** can improve performance in some cases.

Vertical_Offset=n


Applies a vertical offset to all the data on the page relative to the paper or media represented in the PDF. The units of this setting are in 1440 units per inch.

Working with AFP Visual Environment Control Files

The AFP2PDF Plus transform uses the AFP Visual Environment (AVE) program to manipulate the AFP before it is converted to PDF. AVE is a JAVA-based program that allows you to manipulate AFP files in a variety of ways.

[AVE and AFP2PDF Plus, p. 48](#) shows how AVE works with the AFP2PDF Plus transform.

AVE and AFP2PDF Plus

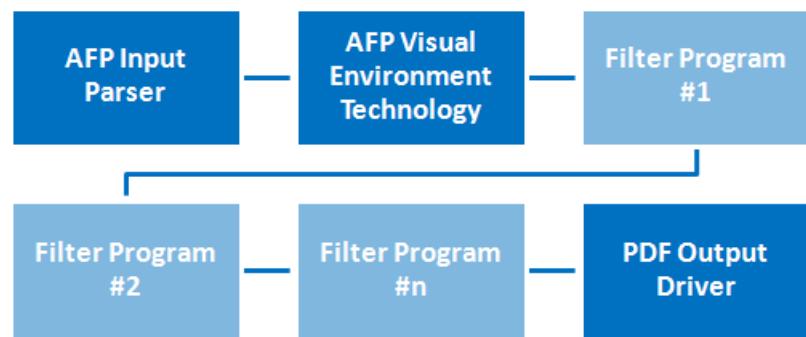

The AFP Input Parser works with AVE to run AFP filter programs. AFP filter programs are small JAVA programs, designed to do one thing and do it well. AFP filter programs can perform such operations as redacting text, deleting blank pages, or creating watermarks. Everything works together in a stream environment for optimum performance. Data is streamed from one program to the next and then sent to the PDF Output Driver.

Running AFP2PDF Plus in a private Azure Cloud

Microsoft Azure provides a wide variety of virtual machines with configurable operating systems like Windows, Linux SUSE, CentOS, and configurable resources, for example: memory, CPUs, storage space, storage type HDD/SDD.

Requirements to support a private cloud:

AFP2PDF Plus requires these packages to run properly on Unix-based Virtual Machines:

- **SystemD Package**
 - The System D is necessary to be able to run AFP2PDF Plus as a service.
- **Fontconfig package**
 - The fontconfig package is a requirement for Java that is needed by AFP2PDF Plus for writing the PDF file.

To start automatically, the AFP2PDF Plus Server must be installed as a service.

 **Note**

To provide support, the support team needs access to information regarding the configuration files or trace information that can be found on the private cloud virtual machines. You must access your virtual machine to retrieve the information we need to provide support in setting up your environment.

5. Using the AFP2PDF Plus Utility Programs

- **split_ftp2pdf Command**
- **ArchiveLoad_ftp2pdf Command**

The following utilities for working with AFP files are included with the AFP2PDF Transform Plus program. The jar file a2psplit.jar contains two utilities: split_ftp2pdf and Archiveload_ftp2pdf.

split_ftp2pdf Command

The **split_ftp2pdf** command takes an indexed AFP print file, splits it up into separate statements, and invokes the AFP2PDF Plus transform. The input AFP data must be divided into separate page groups (statements) and contain AFP index values for each group. This type of data is created either by the AFP Conversion and Indexing Facility (ACIF), the AFP Visual Environment (AVE) or an equivalent function.

The **split_ftp2pdf** command creates a separate PDF output file for each statement. The name of the output file corresponds to at least a single associated index value. For example, if the index field **ACCOUNT** is selected, each output file is named with the actual account ID (such as 123456.pdf).

A Windows batch file, **split_ftp2pdf.bat**, or a UNIX executable script, **split_ftp2pdf**, invokes the JAVA application to split the AFP file. The command invokes the AFP2PDF Plus Transform for each statement so the same configuration and setup for the transform program applies. The **split_ftp2pdf** module must be placed in the same directory where the AFP2PDF Plus Transform files are installed.

Syntax

```
split_ftp2pdf [-c size] [-d outputpath] [-e password] [-f fdeffile] [-g
codepageid][-h fontdefpath] [[-i index1 [-i2 index2
[-i# index# [... [-i10 index10]]]]]|[-ix hexindex1 [-ix2 hexindex2
[-ix# hexindex# [... [-ix10 hexindex10]]]]]] [-indexafporder]
[-k path] [-legacylog] [-m imagemapfile] [-n ] [-nt nThreads][-o optfile]
[-p functions] [-r resfile] [-t rotation] [-temp] [-t1e xm1file]
[-u password] inputfile
```

Parameters

-c size

Specifies the size in bytes of the cache used for resources. You can add k or m at the end of the specified value to indicate that kilobytes or megabytes are used instead. Values that are greater or equal to 2 gigabytes are not allowed. You can use only integer values. By default, the cache size is set to 0. Using a non-zero cache size might increase the resulting output size.

-d outputpath

Specifies the directory for all the output files. If this parameter is not specified, the output files are placed in the current directory.

-e password

Specifies an alphanumeric password that gives permission to change document security settings (also known as a *master*, *owner*, or *permissions* password). For example, if the printing function in the

PDF display has been restricted (-p p), you must supply a password to override the setting. The same password is applied for each output file.

-f *fdeffile*

Specifies the fully qualified name of the form definition resource that is used on each statement when transforming the AFP document.

-g *codepageid*

Specifies the code page global identifier CPGID to be used when interpreting the values for the -ix and -ix2 to -ix10 parameters. If no -ix type parameter is used, this parameter has no effect. The default value is **500**.

-h *fontdefpath*

Specifies the location of the font definition files when a code page ID is specified with the **-g** parameter. Use the **-h** parameter if the font definition files are not located in the \font subdirectory of the current directory.

-i *index1*

Specifies the index field used for generating the output file names. For example, if **-i RouteID** is specified and if a statement has a routing ID of ABC, the output file name ABC is generated.

The user must know which index fields are available for the AFP data and must pick a field that is unique for each statement. For example, a single index field, such as **ZIPCODE**, might not be have unique values for all statements. In that case, statements with the same ZIP Code would have the same file name, causing an overwrite of the output file.

If this parameter is not given, the first index field found in the AFP data is used. If an index field name not available in the AFP data is given, no corresponding PDF file is generated.

-i2 *index2* to -i10 *index10*

Specifies the index field number used for generating the output file names. The index attributes range from 2 to 10.

Note

- You can specify either all **-i** or **-ix** type parameters.

-ix *hexindex1*

Specifies the index field used for generating the output file names. This parameter is the same as the **-i** parameter except that is used when the index name is specified in hexadecimal notation.

-ix2 *hexindex2* to -ix10 *hexindex10*

Specifies the index field number used for generating the output file names. The index attributes range from 2 to 10.

-indexafporder

Organizes the entries from the index file in the same document order as the input AFP file.

inputfile

Specifies the AFP input file that is to be split and transformed to PDF. This parameter is required.

-k *path*

Specifies a fully qualified path of an alternate location for the log files generated during the transformation. Each corresponding PDF output file comes with an associated log file if errors occur during transformation. The log file name is *output_PDF_file_name.pdf.log*. The corresponding log file will not be generated if there are errors generated on the associated statement.

-legacylog

Indicates that the log file format for `split_alf2pdf` and legacy `split_alf2pdf` should match.

-m *imagemapfile*

Specifies the location and name of the image map configuration file that is used by the transform.

-n

Generates a different PDF output file name if the file already exists. For example, the PDF output file *ABCD_2.pdf* is generated if the output file name *ABCD.pdf* already exists.

-nt *nThreads*

Specifies the number of threads for the transform to run. The default is 4.

-o *optfile*

Specifies the location and name of the transform options file. The default is *a2pxopts.cfg* in the same directory as the program module. This file name must not use relative paths and must be fully qualified. See [AFP2PDF Plus Transform Options File, p. 31](#) for more information about the options file.

-p *functions*

When used with an owner password (**-e password**), specifies which PDF display functions are restricted. The codes for the display functions, which can be used in any order, are:

a

Add or modify text annotations and interactive form fields.

c

Modify the document contents.

d

Assemble the document by using options such as inserting, rotating, or deleting pages. You can also create bookmarks or thumbnail images.

i

Fill in existing interactive form fields.

p

Print the document.

q

Print the document using low quality settings.

s

Copy text and graphics from the document.

-r *resfile*

Specifies the fully qualified file name of the AFP resource group to be used when transforming the AFP file. For example, `split_ftp2pdf -r c:\mydirectory\afpresfile.res afpfile.ftp`.

-t rotation

Specifies the rotation value to use when transforming the file. Valid values are **0, 90, 180, and 270**. The default is **0**.

Some AFP files might have already been formatted with a rotated orientation. In this case, use this parameter to align the text in an upright position.

-temp

Specifies the use of a temporary file to hold the statement for transformation. In certain circumstances, the input statement may exceed the available JAVA memory space. The temporary file is created in the directory specified by **-d** and is deleted when the transform is finished, whether successful or not. The number of concurrent temporary files created is twice the number of threads. Use this parameter only when Support tells you to do so.

-t1e xmlfile

5

Specifies the location and name for the xml formatted output file that contains the index information for each PDF file output from the `split_ftp2pdf` program. If this parameter is omitted, the output file will be: `\output_dir\input_ftp_file_name.xml`.

-u password

Specifies an alphanumeric password that gives permission to open the PDF document (also known as a *user* or *document open* password).

The XML Format of Output TLE Information when -t1e is Specified

```
<?xml version="1.0" encoding="UTF-8"?>
<Split_ftp2pdf_plus>
  <Document>
    <Filename> output pdf file name</Filename>
    <TLE>
      <Name>name of the TLE pair</Name>
      <Value>value of TLE pair</Value>
    </TLE>
    ... more <TLE> </TLE> clauses ...
  </Document>
  ... more <Documents> </Document> clauses ...
</Split_ftp2pdf_plus>
```

Return Codes

The `split_ftp2pdf` command returns one of these values:

0

The transform completed successfully.

Nonzero

An error occurred.

split_ftp2pdf generates a summary log file containing the list of the output files generated. The log file is placed either in the current directory or the directory specified by **-d**. This log also contains any warning messages created during the conversion. For example, if an output file was overwritten, it would be indicated by a warning message in this log file. The log also contains the total number of statements processed, along with an overall error return code for the **split_ftp2pdf** process.

Additionally, an individual error log is generated for each AFP statement that encounters an error during transform processing.

ArchiveLoad_ftp2pdf Command

The **ArchiveLoad_ftp2pdf** command is designed to convert AFP into PDF for efficient loading into Enterprise Content Management (ECM) systems, including IBM's Content Manager OnDemand. It uses page group level Tag Logical Elements (TLEs) to determine document boundaries and then converts each document to PDF. The resulting documents are concatenated into one PDF object. An output index file is created that contains the byte level offset and extent, along with the TLE index information for each document in the PDF object. This index file is available in an XML format or an IBM's CMOD Generic Indexer format.

A Windows batch file, **ArchiveLoad_ftp2pdf.bat**, or a UNIX executable script, **ArchiveLoad_ftp2pdf.sh**, invokes the JAVA application to create the PDF object and the output index file. The command invokes the AFP2PDF Plus Transform for each statement so the same configuration and setup for the transform program applies. The **ArchiveLoad_ftp2pdf.bat** module must be placed in the same directory where the AFP2PDF Plus Transform files are installed.

Syntax

```
archiveLoad_ftp2pdf[-d outDir path][-c opt file name]
[-I ind file name] [-o pdf file name][-t rotation [-r res file]
[-temp temp dir [-nt nThreads [-h font directory] [-utf8] [-z ind
config file [-log log file] [-odload] [afpfile]
```

Parameters

-c opt file name

Specifies the fully qualified or relative path of the option file name for the ftp2pdf transform. This parameter is optional.

-d outDir path

Specifies the directory for the output files. If this parameter is not specified, the output files are placed in the current directory. This parameter is optional.

-h font directory

Specifies the location of the font directory. This parameter is optional.

-log <path>

Specifies the log file name. The default log file name is <outDir path>/afp with extension ".log" without ".afp". This parameter is optional.

-i *ind file name*

Specifies the index field used for generating the output file names. The default file name is <outDir path>/afp with extension ".xml" without ".afp".

AFP2PDF ignores this flag if -odload is specified. This parameter is optional.

-nt <nThreads>

Specifies the number of threads that run concurrently for the transform. The default number of threads is 8. This parameter is optional.

-o *output name*

Specifies the output archive data file name. The default file name is <outDir path>/afp with extension ".pdf" without ".afp". If -odload is specified, the default output archive data file name is <outDir path>/<afpfile>.ARD.out. This parameter is optional.

-r *resfile*

Specifies the fully qualified or relative path of the external resource file for the afp2pdf transform. This parameter is optional.

-t *rotation*

Specifies the rotation value to use when transforming the file. Valid values are **0**, **90**, **180**, and **270**.

The default value is **0**. This parameter is optional.

-z *ind config file*

Specifies the fully qualified or relative path of the index manipulation configuration file for the afp2pdf transform. This parameter is optional.

The configuration file contains this list:

Index_AFPOrder

Arranges the entries from the index file in the same document order as the input AFP file.

Index_Remove, indexFieldName

Index_Remove removes the index that matches the value specified as the indexFieldName.

Index_Rename, indexFieldName, NewIndexFieldName

Index_Rename renames the index that matches the value specified for indexFieldName to the value specified for NewIndexFieldName.

-afpfile

Specifies the fully qualified or relative path name of the input afp file. For example, ArchiveLoad_afp2pdf -c opt.cfg -o sample_out.pdf -i sample_index.xml sample.afp. This parameter is required.

-odload

Generates -odload output files and formats. This parameter is optional. The default -odload output files are:

1. **output data file** <outDir path>/<afpfile>.ARD.out
2. **index file** <outDir path>/<afpfile>.ARD.ind
3. **trigger file** <outDir path>/<afpfile>.ARD

-temp

Specifies the use of a temporary space for each statement instead of memory buffer. It is used to avoid from using up memory heap for huge statement. If *-temp* is specified, the default temporary file is <output directory>/temp. This parameter is optional.

-utf8

Use UTF-8(code page 1208) as the text encoding for output index file. The default is to use JVM "file.encoding" property. This parameter is optional.

6. Working with AFP Resources

- **Files Supplied for Mapping Fonts**
- **Process for Mapping Fonts**
- **Using Custom AFP Raster Font Files**
- **Using Custom Font Metric Files**
- **Mapping AFP Fonts to Type 1 Fonts**
- **Using AFP metrics in mapped font**
- **Mapping AFP Fonts to TrueType Fonts, OpenType Fonts, or TrueType Collection Fonts**
- **Using AFP TrueType Fonts**
- **Using User Defined Characters within a DBCS Font**
- **Character encoding**

The AFP resources used by the AFP2PDF Plus Transform include:

- Page segments
- Overlays
- Form definitions
- Character set raster and outline font files.

The page segment, overlay, form definition and font file resources can be passed to the transform from these locations:

Inline resource group

The AFP resources needed by the AFP data file are combined into a logical resource library for the document. This resource group is contained in the AFP file along with the AFP document.

External resource group

The AFP resources needed by the AFP data file are combined into a logical resource library for the document and are passed to the transform as a separate file.

The **afp2pdf** command specifies this resource file with the **-r** parameter. See [Working with AFP Resources, p. 59](#) for more information.

Resource directories

AFP resource files can be placed in specific directories that the transform program searches for when converting a document. The user can specify multiple directories and the directories are searched in the order that they are given.


By default, resources are placed in a `\resource` subdirectory where the transform code modules were installed. You can specify other directories with the **ResourceDataPath** parameter in the transform options file. See [Working with AFP Resources, p. 59](#) for more information.

Note

The directory and file examples in this chapter are specified for the Windows environment. To use these examples in a UNIX environment, use the UNIX file naming convention for any file name. For example, `\font\maps` in Windows is `/font/maps` in a UNIX environment, or the input AFP file `c:\documents\afpdoc.amp` in Windows would be `/documents/afpdoc.amp` in a UNIX environment.

The AFP2PDF Plus Transform must process the AFP fonts your document was created with to fonts that can be displayed with Adobe Acrobat. This means either *mapping* an AFP font to one of the Base 14 fonts that Acrobat has internally defined or *embedding* a True Type or Adobe Type 1/Type 3 font. [Font Processing Options, p. 60](#) shows the available ways to process fonts.

Font Processing Options

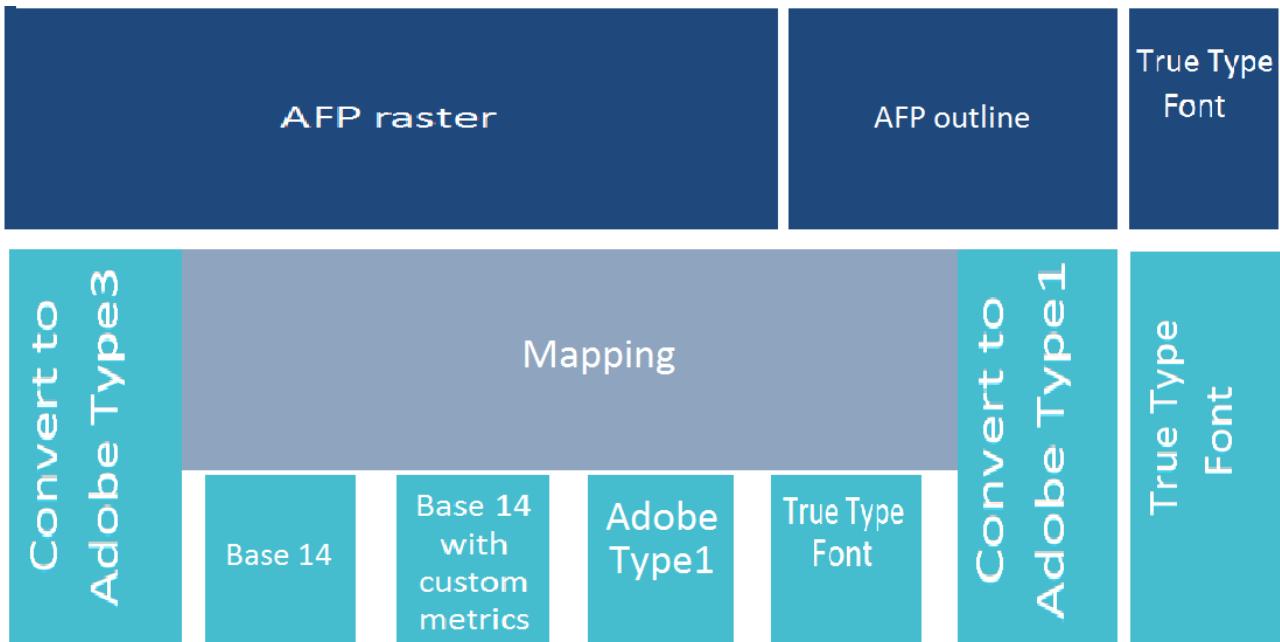

6

Files Supplied for Mapping Fonts

[Font Files and Subdirectories, p. 60](#) lists the AFP2PDF Plus Transform font support files and the subdirectories of the installation directory in which they are installed.

Font Files and Subdirectories

File	File Name	Subdirectory	Description
Alias file	Alias.fnt	\font	Maps the font type families to PDF font name and optionally specifies the font metric file to use during the transform.
Character set definition file	csdef.fnt	\font	Defines AFP character set attributes, such as point size. It also maps the font character set to the font global identifier.
FND name defaults file	csdef.def	\font	Provides default processing for FND names.
Coded font files	icoded.fnt, coded.fnt	\font	Specify which AFP code page and AFP font character set make up the coded font.
Code page definition file	cpdef.fnt	\font	Maps each AFP code page to indicate which code page map file to use for the AFP2PDF Plus Transform.
Code page map file	cpgid.cp	\font\maps	Defines character identifier mappings. It matches the AFP

File	File Name	Subdirectory	Description
			code page character identifiers and their hexadecimal code points with a corresponding character identifier and ASCII code point available in the PDF environment. The default is Code Page 1252.
Font mapping file	afpfont.fnt	\font	Defines the fonts where the raster character images for the AFP font files are extracted and placed as images in the output PDF.
Custom font metric files	Custom-metrics-xx.met	\font\Type1	The default location for metric information for custom fonts (optional).

Using the country.cfg configuration file

The afpfont.fnt, alias.fnt, cpdef.fnt, csdef.fnt, icodec.fnt, and coded.fnt font configuration files can be renamed using a different extension by adding a country.cfg configuration file in the font directory. The font directory path is specified either by the **-n** flag or the *Font_path* entry in the a2pxopts.cfg file.

The contents of the country.cfg file is Country=zzz, where zzz can be one of these values: *cht*, *chs*, *jpn*, *kor*, *fnt*, matching the file name extension. The default extension is .fnt.

Coded Font Files

The coded font files (coded.fnt and icodec.fnt) map AFP coded fonts to their AFP character sets and code pages.

Coded Font Files

Coded Font File Name	Description
coded.fnt	Contains user-defined coded fonts. This file is optional, but if it exists must be placed in the \font subdirectory.
icodec.fnt	Contains standard definitions for approximately 2500 coded fonts supplied by Ricoh.

If a coded.fnt file exists in the \font subdirectory, the AFP2PDF Plus Transform searches it first for the coded fonts used in an AFP file. [Example of a coded.fnt File, p. 62](#) shows an example of the contents of the coded.fnt file.

Example of a coded.fnt File

```
X?A155N2=C?A155N1,T1DCDCFS
X?AE10=C?SOAE10,T1SOAE10
X?GT10=C?DOGT10,T1D0BASE
X?ST15=C?DOST15,T1D0BASE
X?A0770C=C?A07700,T1GI0361
X?T0550C=C?T05500,T1DCDCFS
```

Syntax rules

- A question mark (?) can be used only as the wildcard character for the second character in the coded font name and the character set name. This allows all the character rotations of the coded fonts to be handled with one entry while searching.

 **Note**

A sequential search is performed for the coded font, and the first match (including the wildcard character) is used.

- After the coded font name, the character set name must be listed first, followed by the code page name.
- The character set and code page must be separated by a comma.

Character Set Definition File

The character set definition file (csdef.fnt) specifies the character set attributes and font global identifier of the font. It is split into two sections, one for character sets (**CHARSET**) and one for font global identifiers (**FGID**).

The **CHARSET** section lists each AFP font character set and its corresponding attributes. [CHARSET Section of the csdef.fnt File, p. 62](#) shows an example of the **CHARSET** section in the csdef.fnt file.

CHARSET Section of the csdef.fnt File

```
[CHARSET]
;charset = fgid, height, width, strikeover, underline
C?H200A0=2304,110,73,0,0
C?H200D0=2304,140,93,0,0
C?N200B0=2308,120,80,0,0
C?4200B0=416,120,144,0,0
C?DOGT15=230,80,96,0,0
C?A155A0=33207,110,73,0,0
C?A175A0=33227,110,73,0,0
C?T055D0=4407,140,93,0,0
C?T17500=4555,100,67,0,0
C?T17560=4555,60,40,0,0
DEFAULT=2308,80,0,0,0
```

[Attribute Values for CHARSET, p. 63](#) describes the attributes and values for **CHARSET**.

Attribute Values for CHARSET

Attribute	Values	Shipped Default	Description
<i>fgid</i>	An FGID in one of these ranges: <ul style="list-style-type: none"> • 3840 to 4096 • 65260 to 65534 	2308	A unique font global identifier (FGID) value, which identifies the type family, typeface, and sometimes the point size of the character set. This can be a predefined FGID or your own FGID.
<i>height</i>	1 to 990	80	The vertical size of the character set (minimal baseline-to-baseline value) expressed in tenths of a point. For example, a 9-point font would have a height of 90.
<i>width</i>	0 to 99 (currently ignored)	0	The average horizontal size of the characters in 1440 th of an inch. Currently, 0 is always used because an appropriate font width is based on the height of the font.
<i>strikeover</i>	1 = YES 0 = NO	0	A font whose characters all have a line, parallel to the character baseline, placed over the middle of the character.
<i>underline</i>	1 = YES 0 = NO	0	A font whose characters all have a line underneath the character.

The **FGID** section lists each font global identifier and its corresponding attributes. [FGID Section of the csdef.fnt File, p. 63](#) shows an example of the **FGID** section in the csdef.fnt file.

FGID Section of the csdef.fnt File

```
[FGID]
;fgid = familyname, style, weight, italic 230=Gothic, MODERN,MED,0
416=Courier,MODERN,MED,0
2304=Helvetica,SWISS,MED,0
2308=TimesNewRoman,ROMAN,MED,0
4407=SonoranSerif,ROMAN,MED,0
4555=SonoranSerif,ROMAN,BOLD,1
33207=SonoranSansSerif,SWISS,MED,1
33227=SonoranSansSerif,SWISS,BOLD,1
```

[Attributes and Values for FGID, p. 64](#) describes the attributes and values for **FGID**.

Attributes and Values for FGID

Attribute	Values	Shipped Default	Description
<i>familyname</i>	Font family name reference	Times New Roman	An outline font family name or an AFP family name. "Family name" is the same as "type family" in AFP fonts and "typeface name" in the PDF environment.
<i>style</i>	SWISS, ROMAN, SCRIPT, MODERN, DISPLAY	ROMAN	<p>A type of character face or specific characteristics of the font.</p> <p>Note</p> <ul style="list-style-type: none"> • SWISS is a proportionally spaced, sans serif font. • ROMAN is a proportionally spaced, serif font. • SCRIPT is a fixed-pitch font designed to look like handwriting. • MODERN is a fixed-pitch, sans serif or serif font.
<i>weight</i>	LIGHT, MED, BOLD	MED	The degree of boldness of a typeface caused by different thickness of the strokes that form a graphic character.
<i>italic</i>	1 = YES 0 = NO	0	A font with right-slanting characters.

Syntax rules

- A comma must separate attributes
- A question mark (?) can be used only as the wildcard character for the second character in the character set name. This allows all the character rotations of the coded fonts to be handled with one entry while searching.

Note

A sequential search is performed for the character set, and the first match (including the wildcard character) is used.

- The **CHARSET** section must come before the **FGID** section in the file.
- In the **CHARSET** section of the file, only the *fgid* and *height* attributes are required.
- In the **FGID** section of the file, only the *familyname* and *style* attributes are required.
- If you define a default character set in the file, it must be the last entry in the **CHARSET** section.
- If you add your own AFP font character set to the **CHARSET** section, you must assign it a font global identifier. If the new character set has the same *familyname*, *style*, *weight*, and *italic* attributes as an existing character set, you can use the same font global identifier; otherwise, you must add a unique font global identifier to the **FGID** section.

Code Page Definition File

The code page definition file (cpdef.fnt) maps the AFP code page name to its code page global identifier (CPGID) and, optionally, to an encoding classification and an encoding type for Asian languages.

The section header, **CODEPG**, is followed by a list of AFP code pages and their attributes. The first attribute in each line is the AFP code page global identifier that maps to a code page map file. The second attribute is the encoding classification that you decide is the best match for your AFP code page. The last line gives the default attribute values to be used when a default is required.

[CODEPG Section of cpdef.fnt File, p. 65](#) shows an example of the contents of the cpdef.fnt file.

CODEPG Section of cpdef.fnt File

```
[CODEPG]
;codepage = cpgid,wincp
T1DCDCFS=1003,ANSI
T1DEBASE=2058,ANSI
T1D0BASE=2063,ANSI
T1D0GP12=2085,ANSI
T1GI0395=2079,ANSI
T1GPI363=2066,SYMBOL
T1V10037=37,ANSI
T1V10273=273,ANSI
T1000290=290,ANSI
T1000310=310,ANSI
T1000423=423,ANSI
T1000905=905,ANSI
DEFAULT=361,ANSI
```

Attribute Values for CODEPG

Attribute	Value	Shipped Default	Description
<i>cpgid</i>	A CPGID in the range of 65280 to 65534	361	An AFP-defined code page global identifier (CPGID), your own defined CPGID, or any other CPGID not already used in the file.
<i>wincp</i>	ANSI, SYMBOL, OEM, or NONSTD KJUJIS (Japanese) BIG5 (Traditional Chinese) GB (Simplified Chinese) KSC (Korean) IDENTITY (Unicode)	ANSI	PDF encoding
<i>entype</i>	SBCS or DBCS		SBCS or DBCS encoding type for Asian language definitions

6

Syntax rules

- A comma must separate attributes
- Only the first attribute, *cpgid*, is required.
- If you create your own code page, you must assign it a unique code page identifier. Leading zeros are not valid. (You can use a predefined code page global identifier, but only if the character-to-hexadecimal code mapping is the same for your code page.)
- If you define a default code page in the file, it must be the last entry in the file.

Code Page File Map

AFP2PDF Transform provides one code page map file for each AFP code page supplied with Print Services Facility (PSF) and the Data1 and Sonoran licensed programs. These files are installed in the `\font\maps` subdirectory.

The file is named for its code page global identifier (CPGID) and has a file extension of `.cp` (for example, if `2063.cp` is the file name for the T1D0BASE code page map; its CPGID is `2063`). Each file contains the character identifiers (and associated EBCDIC hexadecimal code points) for an AFP code page and maps them to character identifiers (and associated ASCII code points) for an ANSI or SYMBOL PDF encoding.

[Code page map file example, p. 67](#) shows an example of the contents of the code page map `395.cp` for the T1000395 code page mapped to the ANSI encoding.

Code page map file example

```
;T1000395 to ANSI
SP010000 40 SP010000 20
LA150000 42 LA150000 E2
LA170000 43 LA170000 E4
LA130000 44 LA130000 E0
SP180000 8B SP180000 BB
SM560000 8C SM560000 89
SA000000 8D SP100000 2D
LI510000 8E NOMATCH 00
LF570000 8F NOMATCH 00
SM190000 90 SM190000 B0
LJ010000 91 LJ010000 6A
LF510000 A0 NOMATCH 00
;;;;;; ; SD150000 5E
;;;;;; ; SD130000 60
;;;;;; ; LT630000 FE
/*
```

Syntax rules

- Blanks must separate character identifiers.
- **NOMATCH** means there is not a matching character in the output character set.
- The **NOMATCH** hexadecimal code of 00 is mapped to the undefined code point. When a document contains a character that does not exist in the output character set, that character cannot be displayed. If the character has not been remapped in the code page map file or the alias file, the undefined code point character is displayed as a substitute.
- The string of semicolons (;;;;;;;) means this line is ignored as a comment. It also indicates that the output code page contains a character that does not exist in the AFP code page. The code point for a character not found in the AFP code page can be used for replacing **NOMATCH** characters.
- - If the input code point maps to NOMATCH 00, and the corresponding AFP code page and character set resources are available (inline or in a resource directory), the transform extracts the raster character from the AFP font and places it as an image in the PDF output.

Alias File

The alias file (alias.fnt) lists the font metric file name and the font family name aliases in the **FONT** section. Font family name aliases let you change all of the requested instances of a font family name (as defined in the character set definition file) to another font family name.

[Alias File Example, p. 67](#) shows an example of how the alias.fnt file is used with the AFP2PDF Transform to change all requests for the SonoranSerif font to requests for the Times font, which is one of the base fonts available in the Adobe Acrobat Viewer.

Alias File Example

```
[FONT]
; ***** Requested font = font name,Font metric/AFM filename (or 'NULL' for not
used); SonoranSerif=Times, NULL
```

Syntax rules

- If multiple mappings are listed in the file for the same family name, only the first match is used.
- The alias file is processed sequentially. Items within the alias file are not chained. That is, if Century Schoolbook is set equal to Times, and Times is set equal to Times New Roman, then Century Schoolbook is not set equal to Times New Roman.
- Blanks in family names are treated as characters. For example, New Century Sch1bk is not the same font as NewCenturySch1bk.

Font Mapping File

The afpfont.fnt file specifies the AFP font objects (coded fonts, code pages, and character sets) that should be explicitly processed by the AFP2PDF Plus Transform. AFP raster fonts can be converted to Adobe Type 3 fonts and embedded in the output PDF file. AFP outline fonts can be converted to Adobe Type 1 fonts and embedded in the output PDF file.

[Font Mapping File Example, p. 68](#) shows examples of specifying AFP font objects in this file. The ? wildcard in the second character of character set names (C?RAST01) and coded font names (X?RAST01) can be used to handle efficiently different rotations of raster fonts. The * wildcard used in typical file name matching can also be used to specify multiple resource names (C?MRAS*) with a single entry.

If the AFP font is a raster font, it is also possible to map it to a PDF environment font but have the transform process only specific characters from the AFP font object. For example, C?H00040 84,98,C1 uses AFP raster fonts for code points X'84', x'98', and X'C1' and the information defined in the font definition files for all other characters.

AFP fonts consist of multiple parts, including the coded font, code page, and character set objects. All the necessary object names must be listed in the appropriate section. Otherwise, the AFP font is not explicitly processed.

Font Mapping File Example

```
[CODEDFNT]
;Coded Font
;X?*X?RAST01

[CODEPG]
;Code Page
T1RAST01;T?*

[CHARSET]
;Character Set
C?RAST01
C?MRAS*
C?H00040 84,98,C1
C?* 0
```

Process for Mapping Fonts

If your document uses an AFP font that is not listed in the font definition file, if you have modified the AFP fonts, or if you have created your own AFP fonts, you must edit the font definition files to add the fonts so that documents using those fonts display correctly with the AFP2PDF Plus Transform.

For example:

- If you created a new coded font (or renamed one), you need to define the coded font in the coded font file (*i coded.fnt* or *coded.fnt*).
- If you created a new character set, you must define it in the character set definition file (*csdef.fnt*).
- If you created a new code page, you must define it in the code page definition file (*cpdef.fnt*).
- If you created a new code page or modified a code page by moving characters, you need to create a new code page map file (*cpgid.cp*).

If you modified an existing font component, for example, by deleting code points in the code page, you might not need to edit some of the definition files.

After determining which font files you need to modify, follow these steps to map your fonts:

1. Gather the information needed to define the fonts in the font definition files.
2. Make backup copies of any of these font definition files that you plan to modify:

afpfont.fnt
 alias.fnt
 coded.fnt
 cpdef.fnt
 csdef.fnt

Backup copies let you restore the original file if the modified copy becomes corrupted.

3. Assign substitutes for nonmatching characters in the code page map file.
See [Process for Mapping Fonts, p. 69](#) for information about code page map files.
4. Edit the *cpdef.fnt* file and add your code page name, code page identifier, and the best matching encoding classification for the fonts you are using.
5. If you created a new character set, edit the *csdef.fnt* file.
 1. Add your character set name in the **CHARSET** section.
 2. Specify the correct attributes for your font.
 3. Add the appropriate information in the **FGID** section of the file if you are naming a new font global identifier.
6. If you have created a coded font, create or edit the *coded.fnt* file and add your coded font.
7. If you use AFP raster fonts, list the corresponding AFP coded fonts, code pages, and character sets in the *afpfont.fnt* file.

Using Custom AFP Raster Font Files

AFP font objects whose names are not listed in the font definition files like *csdef.fnt* and *cpdef.fnt* are considered custom.

If the custom font consists of raster characters, the AFP2PDF Plus Transform can be configured to process the AFP font data for high fidelity output. To do this, the transform first looks for the AFP coded fonts, code pages, and character sets entries in the `afpfont.fnt` file. If the font objects are listed, the transform looks for the necessary AFP font resource data, using this search order:

1. Resources that are inline with the document data
2. The resource group file specified on the `afp2pdf` command
3. Resource directories

Processing AFP raster font characters provides higher-fidelity output than AFP printed output; but when these small raster characters are presented on the screen, the display may not be optimal because image data is dynamically scaled.

Using Custom Font Metric Files

The AFP2PDF Plus Transform can be configured with custom font metric files to control the placement of individual characters and to aid in text alignment. The transform uses the default fonts available in the PDF display application (for example, Adobe Acrobat) and applies special character widths as specified in the font metric file.

Font metric files should be set up to use the default PDF WinANSI encoding (code page 1252). They cannot be used for double-byte text (Asian languages). The files are located in the `\font\Type1` subdirectory and are named `Custom-Metrics-xx.met`, where `xx` is 1 to 99.

To configure the transform, specify the name of the font metric file as the first parameter in the `alias.fnt` file. Set the second parameter, specifying the Adobe Font Metric (AFM) file name, to `NULL`.

[Custom Font Metric files Defined in the alias.fnt File, p. 70](#) shows an example of the `alias.fnt` file with entries that define custom font metric files to the transform.

Custom Font Metric files Defined in the alias.fnt File

```
;**** Requested font=font name,Font metric/AFM file name (or
'NULL' for not used) *****
Font1=Custom-Metrics-1,NULL
Font2=Custom-Metrics-2,NULL
;***** End User-defined/Custom names *****
```

The format of custom font metric files follows the AFM specification, including these additional parameters that describe the font used for the display:

Flags

Specifies various characteristics of the font. [Values for the Flags Parameter, p. 70](#) shows the allowable values.

Values for the Flags Parameter

Typeface	Flag
Courier—Serif Fixed Pitch	35
Courier Bold	262179
Courier Italic	99
Courier Bold Italic	262243

Typeface	Flag
Helvetica (Arial)—Sans Serif Proportional	32
Helvetica Bold	262176
Helvetica Italic	96
Helvetica Bold Italic	262240
Sans Serif Fixed Pitch	33
Sans Serif Bold Fixed Pitch	262177
Sans Serif Italic Fixed Pitch	97
Sans Serif Bold Italic Fixed Pitch	262241
Times New Roman—Serif Proportional	34
Times New Roman Bold	262178
Times New Roman Italic	98
Times New Roman Bold Italic	262242

StemV

Specifies the width, measured in the x direction, of the dominant vertical stems of characters in the font.

In practical terms, **StemV** represents the weight or boldness of the font. A typical medium weight font has a value of 80. For a light font, the value might be in the 65–70 range. A bold font might have a value of 120. In all cases, use these values as a starting point. Adjust the **StemV** value to get the output PDF file to look like the original printed output.

ItalicAngle

Specifies the angle, in degrees counterclockwise from the vertical, of the dominant vertical strokes of the font. Typically, this value is in the range of -10 to -15. Adjust as necessary to get the output PDF file to look like the original printed output.

[Example of a Custom Font Metric File, p. 71](#) shows an example of a custom metric file called Custom-Metrics-1.met.

Example of a Custom Font Metric File

```
FontName COCUSTOM
; Description - 'Custom Font 1'
Ascender 924
CapHeight 720
Descender -216
Flags 32
FontBBox -47 -204 996 924
ItalicAngle 0
StemV 90
XHeight 720
StartCharMetrics
C 32 ; WX 240 ; N space ;
C 33 ; WX 252 ; N exclam ;
C 34 ; WX 408 ; N quotedbl ;
C 35 ; WX 480 ; N numbersign ;
C 36 ; WX 480 ; N dollar ;
```

```
C 37 ; WX 756 ; N percent ;
C 38 ; WX 552 ; N ampersand ;
C 39 ; WX 240 ; N quotesingle ;
.
.
.
EndCharMetrics
```

Mapping AFP Fonts to Type 1 Fonts

You can map an AFP Font file to a Type 1 font by specifying the font name in the Alias file (alias.fnt). The figure below shows an example of the mapping AFP fonts to type 1 fonts.

For the mapping to work, AFP2PDF Plus searches the *PFB-Font-Name-1.pfb* Printer Binary file in the PFBPFMDirectory font directory. Also, a font matrix has to exist in the PFBPFMDirectory. Therefore, in the figure below either *PFB-Font-Name-1.pfm* or *PFB-Font-Name-1.afm* must be specified. If the *PFB-Font-Name-1.afm* files exists, the AFP2PDF Plus transform uses it, if it does not exist, it searches for the *PFB-Font-Name-1.pfm* file. You can specify the PFBPFMDirectory in the configuration file as stated in the [Mapping AFP Fonts to Type 1 Fonts, p. 72](#). If the *PFB-Font-Name-1.pfb* file is missing from the PFBPFMDirectory path, AFP2PDF Plus uses the default Times New Roman font.

 **Note**

You can only map single byte fonts to Type1 fonts.

6

AFP font to Type 1 font mapping in the alias.fnt file

```
;**** Requested font=font name,Font metric/AFM file name (or
'NULL' for not used) *****
Font1=PFB-Font-Name-1,NULL
Font2=PFB-Font-Name-2,NULL
;***** End User-defined/Custom names *****
EndCharMetrics
```

Using AFP metrics in mapped font

You can map AFP fonts by specifying to use the AFP metrics instead of the metrics of the mapped font. Specify the **Use_AFP_metrics** config file entry together with changes in the fontfile. The value specified by the **Use_AFP_metrics** must be in the 0-255 range. The fontfile must contain an entry for each font that uses AFP Metrics where it is specified the name (Character Set name) and the same value in hexadecimal notation that was specified in the **Use_AFP_metrics** config file entry. For example, if **Use_AFP_metrics=255**, the afpfont file is C0RAST01 FF.

Mapping AFP Fonts to TrueType Fonts, OpenType Fonts, or TrueType Collection Fonts

You can map an AFP font file to a TrueType font, OpenType font, or a font included in a TrueType Collection by specifying the TrueType font name in the Alias file (alias.fnt) file. The figure below shows an example of mapping AFP fonts to TrueType fonts, OpenType fonts, or fonts that are included in a TrueType Collection.

The extension is specified to differentiate from a mapping to a Type1 font. The extensions that can be used are **.ttf** for mapping to TrueType fonts, **.otf** for mapping to OpenType fonts, and **.ttc** for mapping to TrueType font collections.

For the mapping to work, AFP2PDF Plus searches for the exact name specified in the alias.fnt file, such as *TrueTypeFont-Name.ttf*, *OpenTypeFont-Name.otf*, or *FontName@TrueTypeCollection-Name.ttc*, in the folder specified by the *TrueType_Directory* configuration file. You can specify the *TrueType_Directory* in the configuration file as stated in the [Mapping AFP Fonts to TrueType Fonts, OpenType Fonts, or TrueType Collection Fonts, p. 72](#). If the specified font file is missing from the *TrueType_Directory* path or the font name is not valid, AFP2PDF Plus uses the default Times New Roman font.

When mapping using TrueType font collections, you must specify what font from the collection is used. To specify the font, add the name or the 0-based index of the font, followed by the @ character, in front of the file name of the TrueType font collection.

Any code page defined in the Code Page Definition File (cpdef.fnt) can be used when mapping AFP Fonts to TrueType Fonts. Remember that the code page characters must be within the TrueType character set. To use custom character encoding, the mapping must be placed in the Code Page Definition File and the .ucm file must contain the code page identification in the name structure and must be in the Locale Directory.

AFP font to TrueType font mapping in the alias.fnt file

```
;**** Requested font=font name,Font metric/AFM file name (or
'NULL' for not used) *****
Font1=TrueTypeFont-Name.ttf,NULL
Font2=OpenTypeFont-Name.otf,NULL
Font3=FontName@TrueTypeCollection.ttc,NULL
Font4=2@TrueTypeCollection.ttc,NULL
;***** End User-defined/Custom names *****
EndCharMetrics
```

Using AFP TrueType Fonts

When TrueType fonts and fonts in TrueType font collection are specified in an AFP object container, the AFP2PDF Plus Transform automatically extracts, converts and embeds a TrueType subset into the output PDF file.

Linked TrueType fonts and the use of a Resource Access Table (RAT) are not supported.

Note

- Truetype fonts specified in the AFP file, but not embedded in it, are searched within the path specified in the *TrueType_Directory* configuration file entry. If this entry is missing, the default path is "Font_path/TrueType".
- Similar to the Truetype fonts, fonts in TrueType font collection that are specified in AFP file, but are not embedded in it are searched within the path specified in the *TrueType_Directory* configuration file entry. You need an additional config file entry if the font name differs from the font collection name. You need an entry in *alias.fnt* font config file entry that looks similar to what we have for the mapping AFP fonts to TrueType font collections. For more information about *Font3* and *Font4*, go to: [Mapping AFP Fonts to TrueType Fonts, OpenType Fonts, or TrueType Collection Fonts, p. 72](#).

Using User Defined Characters within a DBCS Font

You can configure the AFP2PDF Plus to process a double-byte character set (DBCS). AFP font characters from certain sections are converted, while the rest are mapped. The sections to convert are specified in the *UDC_Range* configuration entry. The Font resources containing User Defined Characters

(Character Set and Code page) need to be placed in the path specified by the ResourceDataPath transform option.

Character encoding

The AFP2PDF Transform uses the Unicode character encoding standard to reference characters in TrueType fonts. If the AFP text is encoded in a format other than a standard Unicode encoding (UTF-8 or UTF-16), the text must be converted to Unicode during the transformation process. You may require new conversion tables that use the International Components for Unicode (ICU) function.

The `Locale` subdirectory is the default location for the ICU converter files (*.ucm). You can use the `Locale_Path` parameter in the transform options file to define a directory that is different from the default. For more information, see [Character encoding, p. 74](#).

The files must have a .ucm extension and contain the code page ID. For example: `ibm-500.ucm`.

The code page ID is the numerical CPGID defined in the `cpdef.fnt` code page definition file. See [Character encoding, p. 74](#) for more information.

7. Working with AFP Images

- Adding background image from a PDF file
- Mapping AFP images

Adding background image from a PDF file

AFP2PDF Plus can add a background image or logo to the PDF output file by using commands in the AFP2PDF transform options file.

The two commands that you can use are described in [AFP2PDF Plus Transform Options File, p. 31](#):

- **Append_PDF_File** specifies the page origin as the bottom left-hand corner.
- **Append_PDF_File2** specifies the page origin as the top left-hand corner.

You can specify various different options with this command, such as logo placement and scaling. Logo placement and scaling are controlled by specifying a set of linear transformation matrix values.

For more information on these values, see [AFP2PDF Plus Transform Options File, p. 31](#) or the *Adobe PDF Reference V1.7*, Section 4.2.2, "Common Transformations", and Section 4.2.3 "Transformation Matrices".

Mapping AFP images

When an AFP file is converted, images are identified using parameters that specify the name, the position, and the size of each image. If an AFP page contains images, AFP2PDF Plus Transform creates image information entries in an output file. The output file entries can be copied into an image map configuration file to define and map a particular image.

Mapping images lets you handle AFP images in different ways during the conversion process, such as:

- Identifying individual images in your converted files.
- Removing all or some of the images from your converted output.
- Substituting all or some of the images with previously generated images in the PDF output with JPEG images.
- Substituting all or some of the images with a solid-colored rectangle. This is especially useful for improving the look of the shaded areas, defined as images in the AFP data stream.
- Adding an image, which is not part of the AFP data, to the PDF display that models the use of a preprinted form used during printing.
- Storing frequently used images to reduce the size of a PDF file.

The configuration file handles all the image conversion processing. For example, when the transform program is run against an AFP document and an image is encountered, the program searches for a matching image entry in the configuration file. If an entry that matches the name, position, size, or a combination of the three is defined, the information from the configuration file is used to convert the image. If a matching image entry in the configuration file contains an empty entry, the image is not generated in the PDF output file.

Note

- The file examples in this chapter are specified for the Windows environment. To use these examples in a UNIX environment, use the UNIX file naming convention for any file name. For example, the input AFP file `c:\documents\afpdoc.amp` in Windows is `/documents/afpdoc.amp` in a UNIX environment.

Creating the image map configuration file

To map images for the AFP files perform these steps:

1. Create an image map configuration file, transforming a sample AFP document that contains all documents with images.
2. Identify the image entries and define them in the configuration file.

The image information in the configuration file is used to identify the images in the AFP file and map them during the conversion process.

Image information in the image map configuration file

```
<IMAGE position: (5.250in, 0.613in) size: (0.667in, 0.800in)>
<IMAGE_END>
<IMAGE position: (0.863in, 8.483in) size: (2.400in, 0.667in)>
<IMAGE_END>
<IMAGE position: (3.596in, 8.550in) size: (2.633in, 0.700in)>
<IMAGE_END>
<IMAGE name: (S1PSEG01) position (6.162in, 8.483in) size: (2.067in,
0.604in)>
<IMAGE_END>
```

Each IMAGE tag along with its corresponding <IMAGE_END> tag defines a single image information entry in the configuration file. The first value for position and size is the horizontal dimension and the second value is the vertical dimension. The position measurements are for the upper, left-hand corner of the image relative to the upper, left-hand corner of the page.

By default, the image map configuration file is named `imagemap.cfg`. AFP2PDF Plus Transform searches for the file in the same directory where the program was installed. However, you can specify a different location and name for the file.

To create the image map configuration file:

1. Create or modify the AFP2PDF Plus Transform options file with the entry `ImageMapEntries_File=outputfile`, where `outputfile` is the location and name of the file for the AFP file image information. For example, `ImageMapEntries_File=c:\imagemap.out`. Optionally, you can specify a true or false flag after the output file to specify whether you want MD5 checksums for images.
See [AFP2PDF Plus Transform Options File, p. 31](#) for more information on the AFP2PDF Plus Transform option parameters.
2. Enter `afp2pdf afpfile` to run the AFP2PDF Plus Transform, where `afpfile` is the directory and file name of the AFP document to convert. For example, `afp2pdf c:\documents\afpdoc.afp`.
The system generates an output file with image information for the AFP file and a PDF file for the AFP file. For example: `c:\imagemap.out c:\documents\afpdoc.pdf`
3. Copy the image lines in the output file (such as `imagemap.out`) into the image map configuration file (`imagemap.cfg` by default).
4. Add image information between the starting `<IMAGE>` and ending `<IMAGE_END>` lines for the images you want to generate in the PDF output file.

The image information in the configuration file is used to identify the images in the AFP file. When AFP2PDF Plus Transform matches an image from the AFP file with the image information from the configuration file, it generates the image in the PDF output file.

Identifying AFP images in the image map configuration file

You can identify the images from the configuration file from the name, position, and size information, or you can work with the **afp2pdf** transform command to visually identify individual images. By creating empty image entries and then commenting out a single entry in the file, you can identify the image when you rerun the transform and the image is generated in the output PDF file.

To identify individual images:

1. Define empty image information entries for all images in the image map configuration file. Empty entries do not include any image information between the starting <IMAGE> and ending <IMAGE-END> lines. For example:

```
<IMAGE position:(0.863in,8.483in) size:(2.400in,0.667in)><IMAGE_END>
```

2. Comment out the first image in the configuration file by adding slashes before the entry. For example:

```
//<IMAGE position:(5.250in,0.613in) size:(0.667in,0.800in)>
//<IMAGE_END>
<IMAGE position:(0.863in,8.483in) size:(2.400in,0.667in)>
<IMAGE_END>
<IMAGE position:(3.596in,8.550in) size:(2.633in,0.700in)>
<IMAGE_END>
<IMAGE name:(S1PSEG01) position:(6.162in,8.483in) size:(2.067in,0.604in)>
<IMAGE_END>
```

3. Run **afp2pdf** to generate a PDF file that contains only the image that you commented out. For example: **afp2pdf c:\documents\afpdoc.afp**, where **c:\documents\afpdoc.afp** is the directory and file name of the converted AFP document.

Removing images using the image map configuration file

The image information in the configuration file is used to identify the images in the AFP document and map them to the PDF file during the conversion process. If a matching image entry in the configuration file contains an empty entry, the image is not generated in the PDF output file. Empty entries do not include any image information between the starting <IMAGE> and ending <IMAGE-END> lines. For example:

Empty entries in the image map configuration file

```
<IMAGE position: (0.863in, 8.483in) size: (2.400in, 0.667in)><!-- IMAGE_END -->
```

To remove AFP file images, so they are not generated in the output PDF, create empty image entries in the configuration file.

To remove images:

1. Define empty image information entries in the image map configuration file for the images you do not want to generate in the PDF file.
2. Run **afp2pdf** on the AFP file (for example, `afp2pdf c:\documents\afpdoc.amp`). A PDF file is generated (such as `c:\documents\afpdoc.pdf`) that does not contain any images with empty entries in the configuration file.

Substituting existing images with AFP2PDF Transform

During the AFP2PDF PlusTransform process, you can use the image map configuration file to substitute an AFP image with a previously generated image. The only type of image to substitute is the JPEG format.

To use an existing image, add IMAGE definition parameters between the starting <IMAGE> and ending <IMAGE_END> lines of an image information entry in the image map configuration file.

The image definition parameters are:

XPos=n

Defines the position of the left edge of the image relative to the left edge of the page. The units of this parameter are 1440 units per inch.

YPos=n

Defines the position of the top edge of the image relative to the top edge of the page. The units of this parameter are 1440 units per inch.

XSize=n

Defines the target area width to match the size of the image. The units of this parameter are 1440 units per inch.

YSize=n

Defines the target area height to match the size of the image. The units of this parameter are 1440 units per inch.

Filename=path

Specifies the fully qualified location and file name for the image.

Note

- When you use a blank within the value, the text is enclosed in double quotes.

ColorFlag=0 | 1

Specifies the type of image to substitute. This is an optional parameter; if specified, the value is set to 1.

Example of existing images in the image map configuration file

```
<IMAGE position:(5.250in, 0.613in) size:(0.667in, 0.800in)>
IMAGE XPos=0 YPos=0 XSize=900 YSize=200 Filename="c:\images\logo1.jpg"
<IMAGE_END>
<IMAGE position:(0.863in, 8.483in) size:(2.400in, 0.667in)>
IMAGE XPos=0 YPos=0 XSize=500 YSize=300 Filename="c:\images\logo2.jpg"
```

```
<IMAGE_END>
<IMAGE position:(3.596in, 8.550in) size:(2.633in, 0.700in)>
<IMAGE_END>
<IMAGE name:(S1PSEG01) position:(6.162in, 8.483in) size:(2.067in, 0.604in)>
<IMAGE_END>
```

The first image is replaced by logo1.jpg and the second image by logo2.jpg.

You can define abbreviated versions of the image entries to expand the matching capabilities of incoming AFP images. This can simplify and reduce the number of image entries defined in the configuration file. To define abbreviated versions, edit the image entry and specify any combination of name, position, or size. If the incoming AFP image matches all the characteristics listed for the image entry, the image is substituted.

Example of abbreviated image entries in the image map configuration file

```
<IMAGE name: (S1PSEG01)>
IMAGE XPos=0 YPos=0 XSize=500 YSize=300 Filename="c:\images\logo2.
jpg"
<IMAGE_END>
```

When an incoming AFP image matches the name, the substituted image is added to the output.

Substituting AFP shaded images with colored areas

Many AFP documents contain page areas shaded with a gray box. The AFP data stream defines an image with pels laid out in a regular checker pattern to create a gray shading effect. When trying to display this type of image, however, it often becomes distorted because of the scale factor and resolution of the display hardware.

Note

- To avoid this problem, you can use a colored area instead of the shaded image.

To substitute a shaded image with a color area, add SHADED_AREA definition parameters between the starting <IMAGE> and ending <IMAGE_END> lines of an image information entry in the image map configuration file.

The shaded area definition parameters are:

XPos=n

Specifies the position, in inches, of the left edge of the colored area relative to the left edge of the page.

This parameter is optional because the horizontal position of the incoming AFP image is used if XPos is not specified.

YPos=n

Specifies the position, in inches, of the top edge of the colored area relative to the top edge of the page.

This parameter is optional because the vertical position of the incoming AFP image is used if YPos is not specified.

XSize=n

Specifies the colored area width, in inches.

This parameter is optional because the transform uses the width of the incoming AFP image if XSize is not specified.

YSize=n

Specifies the colored area height, in inches.

This parameter is optional because the transform uses the height of the incoming AFP image if YSize is not specified.

Shade_R=n

Shade_G=n

Shade_B=n

Specifies the intensity of the red, green, and blue colors used when generating the color of the area. The values given must be in the range 0.0 to 1.0.

When all three values are set to 1.0, white is generated. When all three values are set to 0.0, black is generated.

If these parameters are not specified, the transform uses the color described by the Shade_RGB parameter in the AFP2PDF Transform options file (see [Substituting AFP shaded images with colored areas, p. 79](#)). By default, Shade_R=0.8, Shade_G=0.8, and Shade_B=0.8 creates a light gray color that is used if no other color specification is found.

Radius=n

Indicates the radius of all corners of the shaded area. If specified, the value applies to all four corners that become equally rounded.

The radius value, measured in inches, should be smaller than half the width or half the height of the shaded area.

You can specify individual values for each corner of the shaded area:

Radius_UL=n

Specifies the radius of the upper left corner. If specified, this value overrides the initial **Radius=n value, for this corner only.**

Radius_UR=n

Specifies the radius of the upper right corner. If specified, this value overrides the initial **Radius=n value, for this corner only.**

Radius_LL=n

Specifies the radius of the lower left corner. If specified, this value overrides the initial **Radius=n value, for this corner only.**

Radius_LR=n

Specifies the radius of the lower right corner. If specified, this value overrides the initial **Radius=n value, for this corner only.**

Layer=n

When the parameter is not specified, the transform uses the **Layer** parameter from the options file.

For more information on the **Layer** option parameter, see [Substituting AFP shaded images with colored areas, p. 79](#).

 **Note**

- If no Layer specification is found, the default value is **Layer=2**.

Example of colored areas in the image map configuration file

```
<IMAGE position:(5.250in,0.613in) size:(0.667in,0.800in)>
SHADED_AREA XPos=5.250 YPos=0.613 XSize=0.667 YSize=0.800
Shade_R=1.0 Shade_G=0.0 Shade_B=0.0
<IMAGE_END>
<IMAGE position:(0.863in,8.483in) size:(2.400in,0.667in)>
<IMAGE_END>
<IMAGE position:(3.596in,8.550in) size:(2.633in,0.700in)>
<IMAGE_END>
<IMAGE position:(6.162in,8.483in) size:(2.067in,0.604in)>
<IMAGE_END>
```

When the first image is encountered, it is substituted with a red, 0.667 x 0.8 inch area positioned at 5.25 x 0.613 inches.

You can define abbreviated versions of the image entries to expand the matching capabilities of incoming AFP images. This can simplify and reduce the number of image entries defined in the configuration file.

To define abbreviated versions:

1. Edit the image entry
2. Specify any combination of name, position, and size.

If the incoming AFP image matches all the characteristics listed for the image entry, the shaded area is substituted.

7

Example of abbreviated colored areas in the image map configuration file

```
<IMAGE size:(0.667in,0.800in)>
SHADED_AREA
<IMAGE_END>
```

When an incoming AFP image matches the image size information, a colored area with the default color is created.

Adding an image to the transform output

The preprinted forms used during the printing process might have a company logo, a table, or grid that is filled in with the print data. To add an image which emulates the preprinted form to the transform output, AFP2PDF Transform performs these steps:

1. Opens the specified image file, which currently can only have JPEG format.
2. Processed the image data.
3. Converts the data into an image for the PDF output.

The image can be in color and you can specify which pages it is included on.

To include an image that emulates a preprinted form, add one or more of these static image definitions between the starting <IMAGE> and ending <IMAGE_END> lines of the image information entry in the image map configuration file:

STATICIMG_PAGE

Same image is included on the pages with Type parameter.

STATICIMG_FRONT

Image on the front sheet of AFP data is placed on pages with Type parameter, in the output PDF.

STATICIMG_BACK

Image on the back sheet of AFP data is placed on pages with Type parameter, in the output PDF.

 **Note**

If running the image map option from the `afp2pdf_split` tool, the STATICIMG_FRONT and STATICIMG_BACK refer to the front and back of the document that results after the splitting.

STATIC_IMG

Same image is included on the pages with the Type parameter. Using 72 units per inch, you can set specific image position and size dimensions.

These parameters are used with the static image definitions:

XPos=n

Specifies the left edge position of the image relative to the left edge of the page. The units of this parameter are 1440 units per inch.

YPos=n

Specifies the top edge position of the image relative to the top edge of the page. The units of this parameter are 1440 units per inch.

XSize=n

Specifies the target area width where the image is placed. The units of this parameter are 1440 units per inch.

YSize=n

Specifies the target area height where the image is placed. The units of this parameter are 1440 units per inch.

Filename=path

Specifies the fully qualified path and name for the image.

 **Note**

- If a blank is used as part of the value, you must enclose the value in double quotes.

Type=All | First | Second | All-First

Specifies the sheets where the image is placed. The values include:

All

The image is included on all sheets.

First (default value)

The image is included on the first sheet only.

Second

The image is included on the second sheet only.

All-First

The image is included on all sheets except for the first page.

Note

If running the image map option from the `afp2pdf_split` tool, the **Type** options refer to the sheet option (All, First, Second, All-first) from the document that results after the splitting.

Usage note:

- If the Type parameter is not specified, the default value is **First**.

If the page orientation switches between portrait and landscape, these parameters can also be specified to control the position and sizing for the landscape orientation:

XPos_Wide=n

Specifies the position of the left edge of the image relative to the left edge of the page. The units of this parameter are 1440 units per inch.

YPos_Wide=n

Specifies the position of the top edge of the image relative to the top edge of the page. The units of this parameter are 1440 units per inch.

XSize_Wide=n

Specifies the width of the target area where the image is placed. The units of this parameter are 1440 units per inch.

YSize_Wide=n

Specifies the height of the target area where the image is placed. The units of this parameter are 1440 units per inch.

Example of an image added to PDF output

```
<IMAGE>STATICIMG_PAGE XPOS=0 YPOS=0 XSIZEx12240 YSIZE=15840 FILENAME
="C:\afp2pdf\form1.jpg" TYPE=ALL<IMAGE_END>
```

Note

- The image definitions do not include position or size information. You must manually add the starting and ending lines to the image map configuration file, in addition to the static image definitions.
- You can define multiple images on a page. You must verify that the size and position do not cause the images to overlap.

Adding a shaded area to the transform output

To include a shaded area, add one or more of the static shaded area definition parameters between the starting <IMAGE> and ending <IMAGE_END> lines of an image information entry in the image map configuration file:

STATIC_SHADED_AREA

Same shaded area is included on the pages with Type parameter.

STATIC_SHADED_AREA_FRONT

Shaded area on the front sheet of AFP data is placed on pages with Type parameter.

STATIC_SHADED_AREA_BACK

Shaded area on the back sheet of AFP data is placed on pages with Type parameter.

Note

- You can also use the list of SHADED_AREA definition parameters. For more information, see [Adding a shaded area to the transform output, p. 84](#).
- If running the image map option from the `afp2pdf_split` tool, the STATIC_SHADED_AREA_FRONT and STATIC_SHADED_AREA_BACK refer to the front and back of the document that results after the splitting.

Adding an image or shaded area to the transform output based on a TLE key-value pair

Adding images or shaded areas to the output PDF file based on a TLE key-value pair is similar to the method of adding images or shaded areas using the STATICIMG or STATIC_SHADED_AREA. The difference is the ability to specify a key-value pair used as a match mechanism. If the specified key-value pair is found in a TLE structure field on page level or on the group page level, the pair is added to the static image.

To include an image that emulates a preprinted form using the key-value pair condition, add one or more of these static image definitions between the starting <IMAGE> and ending <IMAGE_END> lines of the image information entry in the image map configuration file:

INDEX_STATICIMG

Same image is included on the pages with Type parameter, if the Index condition is met.

You can use the same parameters as **STATICIMG_PAGE**. For more information, see [Adding an image to the transform output, p. 81](#).

INDEX_FRONT_STATICIMG

Image on the front sheet of AFP data is placed on pages with Type parameter, in the output PDF, if the Index condition is met.

You can use same parameters as **STATICIMG_FRONT**. For more information, see [Adding an image to the transform output, p. 81](#).

INDEX_BACK_STATICIMG

Image on the back sheet of AFP data is placed on pages with Type parameter, in the output PDF, if the Index condition is met.

You can use the same parameters as **STATICIMG_BACK**. For more information, see [Adding an image to the transform output, p. 81](#).

INDEX_STATICSHDAREA

Same shaded area is included on the pages with Type parameter, if the Index condition is met.

You can use same parameters as **STATIC_SHADED_AREA**. For more information, see [Adding an image to the transform output, p. 81](#).

INDEX_FRONT_STATICSHDAREA

Shaded area on the front sheet of AFP data is placed on pages with Type parameter, in the output PDF, if the Index condition is met.

You can use same parameters as **STATIC_SHADED_AREA_FRONT**. For more information, see [Adding an image to the transform output, p. 81](#).

INDEX_BACK_STATICSHDAREA

Shaded area on the back sheet of AFP data is placed on pages with Type parameter, in the output PDF, if the Index condition is met.

You can use same parameters as **STATIC_SHADED_AREA_BACK**. For more information, see [Adding an image to the transform output, p. 81](#).

To use the index type definitions, add the following parameter:

INDEX="key : value"

Specifies the key-value pair to be matched. If the page contains a TLE with the same key-value pair, the image or shaded area is added as specified by the Type parameter.

Note

- You can have several INDEX parameters. The condition is that all the key-values pairs from all the INDEX parameters are encountered in the TLE of the page.

If there is no match for the key-value pair index, a default value can be specified using the following entries:

INDEX_DEFAULT_STATICIMG

Same image is included on the pages with Type parameter, if no key-value pair match is found in this <IMAGE><IMAGE_END> group.

You can use the same parameters as **STATICIMG_PAGE**.

INDEX_DEFAULT_FRONT_STATICIMG

Image on the front sheet of AFP data is placed on pages with Type parameter, in the output PDF if no key-value pair match is found in this <IMAGE><IMAGE_END> group.

You can use same parameters as **STATICIMG_FRONT**.

INDEX_DEFAULT_BACK_STATICIMG

Image on the back sheet of AFP data is placed on pages with Type parameter, in the output PDF if no key-value pair match is found in this <IMAGE><IMAGE_END> group.

You can use the same parameters as **STATICIMG_BACK**.

 **Note**

If running the image map option from the `afp2pdf_split` tool, the `INDEX_FRONT_STATICIMG`, `INDEX_BACK_STATICIMG`, `INDEX_FRONT_STATICSHDAREA`, `INDEX_BACK_STATICSHDAREA`, `INDEX_DEFAULT_FRONT_STATICIMG` and `INDEX_DEFAULT_BACK_STATICIMG` refer to the front and back of the document that results after the splitting.

8. JAVA Application Programming Interfaces

The AFP2PDF Plus Transform application programming interfaces (APIs) convert AFP documents and resources into files that can be viewed with Adobe Acrobat. These APIs are written to interface with a JAVA application.

The AFP2PDF Plus Transform APIs use data buffers for input and output to the transform. Many times the AFP data is retrieved from a database in a byte array in memory. The reference to this byte array is then passed directly to the conversion code for processing. The output from the API program also uses a reference to a byte array that contains the transformed output. Therefore, the overhead of opening, reading, and closing files is eliminated. Because system performance degrades if very large byte arrays are allocated, this approach assumes that the input and output byte arrays are not extremely large. The command-line interface, which uses files for input and output to the transform, might need to be used for very large byte arrays.

This chapter contains information about the programming functions available for the AFP2PDF Plus Transform API. They mimic the previous AFP2PDF JAVA APIs and are designed to integrate into existing AFP2PDF installations with minimal migration effort. For more detailed information, see the Javadoc information in the `api` subdirectory.

A2PBufferMessages (boolean flag)

Sets up the logging to buffer messages, which are returned via `A2PGetMessageBuffer()` method. The default message level is **WARNING**.

A2PBufferMessages (boolean flag, java.lang.String level)

Sets up the logging to buffer messages, which are returned via `A2PGetMessageBuffer()` method.

Message levels: **INFO, WARNING, SEVERE, ALL**.

A2PDocEnd ()

Terminates the processing for the last AFP document transform.

A2PDocStart2 (byte[] ResIn, byte[] DataIn, java.lang.String InstallDir)

Initializes the transform processing for an AFP document and resource group file contained in the input byte array. The resulting output PDF must be obtained through the method `getPDFOutBuf()`.

A2PDocStart2 (byte[] DataIn, java.lang.String InstallDir)

Initializes the transform processing for an AFP document contained in the input byte array. The resulting output PDF must be obtained through the method `getPDFOutBuf()`.

A2PDocStart2 (java.lang.String inAFFPFileName, java.lang.String outPDFFileName, java.lang.String resGrpFileName)

Initializes the transform processing for an AFP document, resource group and output file using the input file names. The resulting output PDF is written to the output PDF file name, whether supplied or derived. A call to the method `getPDFOutBuf()` returns null, as the method is only useful when other `A2PDocStart2()` methods are used.

Note

You must call `setFormDef()` and `setOptionsFile()` before calling `A2PDocStart2()`.

A2PGenerateMessages (boolean fGen)

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

A2PGetMessageBuffer ()

Returns the string of log messages since the last XFormDoc.

A2PGetPageCount ()

Returns the number of pages in a specific AFP document. A value greater than 0 indicates a successful completion. A zero value or negative number indicates that an error has occurred.

A2PXFormDoc ()

Transforms the entire AFP document using the given values already set.

A2PXFormPage ()

Transforms one or more pages in an AFP document using the given values already set. The **setPageNumber** method must be used before this method to choose which page to convert. If the last page number is also set, the range of pages is transformed.

A2PXFormPage (int *n*)

Transforms a specific page in an AFP document using the given values already set.

A2PXFormPage (int *StartPageNumber*, int *EndPageNumber*, boolean *LastPage*)

Transforms a range of pages in an AFP document using the given values already set. Both *StartPageNumber* and *EndPageNumber* must be less than or equal to the number of pages in the document. *StartPageNumber* must be less than or equal to *EndPageNumber*.

GetCachedFontMapInfo ()

Returns a string of all font directories currently cached.

getCodeVersion ()

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

getCreateTimeStamp ()

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

getFontPath ()

Gets the value of the *Font Path* variable.

getFormDef ()

Gets the value of the *FormDef* variable and returns the fully qualified path name of the form definition file. This value can be null.

getImageMapFile ()

Retrieves the location of the name of the image map configuration file.

getLastPageNumber ()

Returns the last page number (1-based) to transform.

getLinearize ()

Returns **True** when the linearized option is set.

For more information, see **setLinearize (boolean *n*)**.

getOptionsFile ()

Gets the value of the *OptionsFile* variable and returns the fully qualified file path of the *a2pxopts.cfg* file. This value can be null.

getOwnerPassWord ()

Gets the value of the *OwnerPW* variable and returns the owner password. This value can be null.

getPageNumber ()

Returns the first page number (1-based) to transform.

getPDFOutBuf ()

Gets the PDF output byte array. This value can be null if an error occurred or files were used for IO.

getPermissions ()

Gets the value of the *Permissions* variable.

getRotation ()

Gets the value of the *Rotation* variable and returns the rotation setting (0 | 90 | 180 | 270).

getSignTimeStamp ()

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

getUserPassWord ()

Gets the value of the *UserPW* variable and returns the user password. This value can be null.

getXFormDocParameters ()

Returns a list of parameters and their current values.

InitFontMaps (String *fontDir*)

Initializes the font mapping information for the input font directory. This command can be called multiple times and is used to eliminate the initial costs of reading font mapping data when the first file is transformed. The *fontDir* variable is the fully qualified path name of the font map directory.

setCachingSize (int *size*)

Sets the maximum size of the resource cache used across all transforms within a Java Virtual Machine.

setCreateTimeStamp (java.lang.String *n*)

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

setFontPath ()

Sets the value of the *Font Path* variable.

setFormDef (java.lang.String *n*)

Sets the fully qualified form definition file name.

 **Note**

This value must be set before calling **A2PDocStart2 ()**.

setImageMapFile (java.lang.String *n*)

Specifies the location and the name of the image map configuration file, different from the default file, `imagemap.cfg`. The file name does not use relative paths and is fully qualified. See [JAVA Application Programming Interfaces, p. 87](#) for more information about the image map configuration file.

setLastPageNumber (int *n*)

Sets the last page number (1-based) to transform. If the first page number is not already set using `setPageNumber()`, it is set here to the first page. For example, you can transform the first 33 pages by just setting the last page number to 33.

setLinearize (boolean *n*)

Specifies that the output PDF file is created linearized (or optimized for Fast web viewing).

setOptionsFile (java.lang.String *n*)

Sets the `OptionsFile` variable.

 **Note**

This value must be set before calling `A2PDocStart2 ()`.

setOwnerPassWord (java.lang.String *n*)

Sets the `OwnerPW` variable.

setPageNumber (int *n*)

Sets the first page number (1-based) to transform.

setPermissions (java.lang.String *n*)

Sets the `Permissions` variable.

setRotation (int *n*)

Sets the `Rotation` variable (0 | 90 | 180 | 270).

setSignTimeStamp (java.lang.String *n*)

This command can be specified, but it is not supported in the current implementation. It exists for compatibility purposes only.

setUserPassWord (java.lang.String *n*)

Sets the `UserPW` variable.

writeDataBuf (java.lang.String *fName*)

Writes the current AFP data bytes to the output file name. This value cannot be null.

9. Comparison with AFP2PDF Transform

The AFP2PDF Plus Transform has many of the same options as the AFP2PDF Transform. Some options have been added or deleted and some have had the default values changed.

[AFP2PDF and AFP2PDF Plus Options and Defaults, p. 91](#) compares the options that you can specify in the a2pxopts.cfg for both products. Abbreviations in this table are:

- Y = Yes
- N = No
- D = Deprecated
- R= Reserved
- T= True
- F= False

AFP2PDF and AFP2PDF Plus Options and Defaults

Transform Options	AFP2PDF (5876– W01)	AFP2PDF Defaults	AFP2PDF Plus (5876– W11)	AFP2PDF Plus Defaults
Append_Log_to_PDF	Y	F	N	
Append_PDF_File	Y		Y	
Append_PDF_File2	N		Y	
Author	Y		Y	
Auto_Rotate	Y	F	Y	F
Auto_Rotate_CountBlanks	N		Y	T
Auto_Rotate_ParseOverlays	N		Y	F
Auto_Rotate_UseCharacterRotation	N		Y	F
AVE_Control_File	N		Y	
Bilevel_Image_Cnvt	Y	F	N	
Bypass_White_GOCA_Lines	Y	F	N	
Cache_AFP_Overlay	Y	F	Y	T
Cache_Font_Image	Y	T	N	
Certificate	Y		Y	
Certificate2	Y		Y	
Color	Y		Y	
Compression_Level	Y		N	
Convert_Text_CMYK	N		Y	F
Creator	Y		Y	
Dash_Pattern_Style	Y		Y	
Dash_Pattern_END_CAP	Y		Y	

Transform Options	AFP2PDF (5876- W01)	AFP2PDF Defaults	AFP2PDF Plus (5876- W11)	AFP2PDF Plus Defaults
Default_Encryption_Permissions	Y		Y	
Default_Linearization	Y	F	F	
Default_Owner_Password	Y		Y	
Default_User_Password	Y		Y	
Disable_Bookmark_Generation	Y	F	Y	F
Disable_Compression	Y	F	Y	F
DotDensity	Y		Y	
Enable_Auto_Font_Image	Y	F	Y	F
Enable_Auto_Image_Cache	Y	F	Y	T
Enable_One_Pass	Y	F	N	
Enable_UDC	Y	F	N	
Expand_Index_Values	Y	F	N	
FIPS_Mode	Y	F	Y	F
Flate_Compression_Level	N		Y	6
FontExt	Y		Y	
Font_Image_Pad_Height	Y		N	
Font_Image_Pad_Width	Y		N	
Font_Path	Y		Y	
Force_GOCA_Area_Boundary	Y	F	N	
Generate_Type3	Y	F	Y	T
Global_Scale	Y	50	Y	
GOCA_Color_Of_Medium	N		Y	
GOCA_Pass1	Y		N	
GOCA_Pass2	Y		N	
GOCA_Pattern	Y		Y	
GOCA_Use_Circles	Y	F	Y	F
Honor_Constant_Forms	Y	F	Y	F
Honor_Medium_Orientation	N		Y	F
Honor_Media_Eject_Control	Y	F	N	
Honor_Medium_Colored_Rules	Y	F	N	

Transform Options	AFP2PDF (5876- W01)	AFP2PDF Defaults	AFP2PDF Plus (5876- W11)	AFP2PDF Plus Defaults
Horizontal_Offset	Y		Y	
Ignore_Bar_Code_Object_Area_Size	N		Y	F
Ignore_Data_Font_Height	Y	F	Y	F
Ignore_PTOCA_STC	Y	F	Y	F
Ignore_Transform_Warnings	Y	F	N	
ImageMapEntries_File	Y		Y	
JPEG_Compress_CMYK_Image	Y	F	N	
JPEG_Quality_Level	N		Y	0.95
Keywords	Y		Y	
Layer	N		Y	2
Launch_Preview	Y	F	N	
Legacy_Font_Map	N		Y	F
Locale_Path	Y		Y	
Logging	Y		Y	
Max_Annotes	D		N	
Max_Fonts	D		N	
Max_Images	D		N	
Max_Leaves	D		N	
Max_Objects	D		N	
Max_Overlays	D		N	
Max_Pages	D		N	
Modify_Text_Colors	Y	F	Y	F
Old_Static_Paper	Y	F	N	
Output_IndexInfo	Y	F	Y	F
Output_IndexInfo2	N		Y	F
OverlayExt	Y		Y	
Page_Data_Order_Flags	Y	0	N	
Page_Rotation	Y	0	Y	0
PageSegExt	Y		Y	
PDF/A	Y	F	Y	F

Transform Options	AFP2PDF (5876- W01)	AFP2PDF Defaults	AFP2PDF Plus (5876- W11)	AFP2PDF Plus Defaults
Pdf_extGState_Blend	Y		N	
PfmPfb_Directory	Y		Y	
Preserve_CMYK	Y	F	Y	F
Printer_Resolution	Y		N	
PTX_Drawrule_Use_Line	N		Y	F
Resize_Page_with_Offsets	N		Y	F
Resource_Cache_Size	N			
ResourceDataPath	Y		Y	
Set_BC_GS1_128_Widths	Y		N	
Shade_RGB	Y		Y	
Show_Outline	Y	T	Y	T
Show_Pageids	Y	T	Y	T
Static_Paper_Center	Y	F	N	
Static_Paper_Length	Y		Y	
Static_Paper_Width	Y		Y	
Subject	Y		Y	
Substitute_Default_Medium_Map_Allowed	N		Y	F
Title	Y		Y	
Trace_Level	Y		N	
Transform_All_Subgroups	Y	F	Y	F
TrueType_Directory	Y		Y	
Type3Glyph_Position_Legacy	N		Y	F
UDC_File	R		Y	
UDC_Range	Y		N	
Use_AFP_Metrics	Y	F	Y	
Use_ICU	Y	F	N	
Use_Intermediate_File	Y	F	N	
Use_Unicode	Y	F	N	
Vertical_Offset	Y		Y	

INDEX

A

a2pclient.cfg	24
a2pclient.cfg file	24
a2pxopts.cfg file	
Compared to AFP2PDF	91
File path	29, 53, 89–90
Syntax	31
abbreviations.....	6
ACIF.....	51
AFP fonts	72
AFP raster font characters	40
AFP raster fonts, custom	69
AFP resource group	30, 54, 56
AFP resources	
Location.....	46, 59
Supported	59
AFP TrueType fonts	73
afp2pdf command	
Function.....	27
Parameters	28
Return codes.....	31
Syntax	27
AFP2PDF Transform	
Comparison with	91
Compatibility with.....	11
afpfile	56
afpfont.fnt file.....	68
Alias file	67
alias.fnt file	
Custom metrics in	70
Syntax	67
APIs	87
ArchiveLoad command	
Syntax	55
archiveload_afp2pdf command	
Parameters	55
Author, output file	34
AVE	
Control files	48
Indexed data.....	51

B

Bar Code Size	42
Bar codes supported	9
BCOCA.....	9
BCOCA Colors.....	43
Benefits	9
Bookmarks.....	39

C

Cautions	4
Certificate signatures	26
Character encoding.....	74
Character set definition file	62
client configuration file.....	24
Client handler class	22
Client programs.....	21
client/server communication.....	24
CMYK color space	45
Code page definition file	65
Code page file map	66
Coded font files	61
coded.fnt file.....	61
Color intensity.....	46
Color, RGB color setting.....	36
Commands	
afp2pdf	27
split_afp2pdf	51
Compression	39
Configuration files	
logging.properties	23
Server.cfg	22
Console message handler	23
Constant forms control	41
Content Manager OnDemand	
Installing with.....	19
Integration with.....	21
Content Navigator, installing with.....	19
Control files, AVE	48
conventions	5
cpdef.fnt file.....	65
CPGID	52
Creator, output file	36
csdef.fnt file	62

Custom fonts	
Metrics	70
Raster	69
Custom-Metrics-xx.met file	70
D	
Digital signatures	26
directory	45
Document open password	25, 31, 54
DotDensity	39
E	
Encryption	25, 38
Error logging	
Configuring	23
Log location	43
Turning off console	29
External resource group	59
F	
FGID	62
File message handler	23
FIPS	40
Flate compression level	40
Font configuration files	40
Font height	42
Font mapping	43
Font mapping file	
Example	68
Location	89
Fonts	
Files for mapping	60
font directory	55
Location	30, 52
Mapping	40
Mapping process	69
TrueType	73
Form definition	29, 52, 88–89
G	
GOCA fill patterns	41
H	
Hash_Code	47
Horizontal offset	41
I	
icoded.fnt file	61
Images	75
Caching	40
Important	4
Index fields	52, 56
Inline resource group	59
Input file	31, 52
Installation	
Prerequisites	11
With Content Navigator	19
With OnDemand	19
International Components for Unicode	
ICU	74
J	
Java APIs	87
JPEG quality	42
JPEG support	9
K	
Keywords	42
L	
Legacy	43
Limitations	9
Linearized PDF file	39
Locale_Path	43
Log files	
Location	53
split_ftp2pdf	54
Log files, configuring	23
logging.properties file	23
Logical page size	46
M	
Mapping fonts	69
Master password	25, 28, 51
Medium Map, IMM	47
Medium Orientation	41
N	
N-up partitions	9
nThreads	56

O

Offset	
Horizontal	41
Vertical	48
OpenType	72
Options file	
Compared to AFP2PDF	91
File path	29, 53, 56, 89–90
Syntax	31
Outline fonts	68
Outline window	46
Output files	
Adding images	75
Appending PDF files	32
archiveload_alfp2pdf	55
Encryption	38
File name	
alfp2pdf	30
If file exists	53
split_alfp2pdf	52
Linearized	30
Linearized output file	30
Location	
alfp2pdf	30
split_alfp2pdf	51
opt file name	
archiveload_alfp2pdf	55
outDir path	55
Overlays	
Caching	34
Parsing	34
Overview	9
Owner password	25, 28, 51, 89–90

P

Page count	
Page count output	44
Page Count	
Output	44
Page identifiers	46
Page number	30
Page range	88, 90
Pages	

Count	88
Length	46
Rotation	44
Width	47

Passwords

Default owner	39
Default user	39
Owner	25, 28, 51, 89–90
PKCS#12	26, 35
User	25, 31, 54, 89–90

PDF display functions	28, 53
-----------------------	--------

PDF files, appending to output	32
--------------------------------	----

PDF/A-1b compliance, PDF/A-2b compliance, PDF/A-3b compliance	45
---	----

Permissions	51, 90
-------------	--------

Permissions password	25, 28
----------------------	--------

PfmPfb_Directory	45
------------------	----

PKCS#12 certificate	26, 35
---------------------	--------

PKCS#12 password	26, 35
------------------	--------

Port number

alfp2pdf command	28
Server.cfg file	22

Prerequisites	11
---------------	----

PTOCA	42
-------	----

PTX_Drawrule	45
--------------	----

R

Raster fonts	68
--------------	----

Raster fonts, custom	69
----------------------	----

raster images	40
---------------	----

Requirements	11
--------------	----

Resource directories	59
----------------------	----

Restrictions	28, 53
--------------	--------

Return codes

alfp2pdf	31
split_alfp2pdf	54

RGB color space	45
-----------------	----

Rotation

Auto	34
Character	34
File	31, 54, 56
Page	44

S	
Security	25
Server.cfg file	22
Sleep time	
Between stopFile checks	22
On socket accept	22
split_ftp2pdf command	
Function	51
Invoking	51
Log files	54
Parameters	51
Return codes	54
Syntax	51
Starting server	
UNIX	27
Windows	27
Starting transform	87
Stopping server	
UNIX	27
Windows	27
Stopping transform	87
Subgroup formatting	47
Subject, output file	47
symbols	5
T	
Temporary file	54, 57
Text colors	43
Thread count	22
TIFF support	9
Time stamp	
Document creation	29
Document signature	30
Title, output file	47
Trace information	23
Tracing	43
Trademarks	8
Transform initialization class	22
TrueType	72, 74
TrueType Collection	72
TrueType fonts	73
TrueType_Directory	47
Type 1	72
Type 3 fonts	40
Type3 font glyphs	47
U	
UDC_Range	47
UNIX	
Starting server on	27
Stopping server on	27
User password	25, 31, 54, 89-90
utf8	57
V	
Vertical offset	48
W	
Windows	
Starting server on	27
Stopping server on	27
X	
xml filename	54
xml format	
Parameters	54

